

A photograph of a forest stream with a fallen log and rocks. The stream is surrounded by dense green foliage and trees. The water is clear and flows over rocks. The log is partially submerged and has some moss on it. The background shows a dense forest with many trees.

Best Management Practices for Forestry: Protecting Maine's Water Quality

**DEPARTMENT OF AGRICULTURE,
CONSERVATION & FORESTRY
MAINE FOREST SERVICE
FOREST POLICY AND MANAGEMENT DIVISION**

Third Edition

The Maine Forest Service

The Maine Forest Service was established in 1891 to ensure Maine's citizens the greatest economic and social benefits from the trees and forestlands of the state.

The primary responsibilities of the Maine Forest Service include:

To develop through information, education and formal publications a greater public awareness and appreciation of forests as Maine's basic economy and renewable resource;

To provide advice and assistance in forest management to woodland owners;

To maintain and improve the scenic beauty, wildlife habitat and recreational values of Maine;

To encourage and promote appropriate forestland management practices;

To protect Maine's forests from fire, insects, diseases, and other natural enemies; and

To enforce Maine's forestry laws and rules by preventing violations, intervening with potential problems and, as a last resort, take enforcement action.



3rd Edition
January 2017

ACKNOWLEDGEMENTS FOR THE FIRST EDITION

This document is a publication of the Maine Department of Agriculture, Conservation and Forestry's Maine Forest Service. It fulfills a portion of the state's commitment under its Nonpoint Source Pollution Program (38 M.R.S. §410), and replaces the MFS publication "Best Management Practices Field Handbook" published in 2010.

This document was developed by the Maine Forest Service's Forest Policy and Management Division, with the assistance of FORAT (Forestry Advisory Team), an advisory group with broad representation from Maine's forestry community.

Members of FORAT's BMP Manual Sub-Group include:

- Morten Moesswilde, Maine Forest Service
- Roger Ryder, Maine Forest Service
- Pat Sirois, Professional Logging Contractors of Maine
- Jack Frost, Forests for the Future
- Steve Gettle, MeadWestvaco
- Andy Whitman, Manomet Center for Conservation Science
- Dave Welsch, USDA Forest Service
- Andy Egan, University of Maine, Department of Forest Management

PROJECT MANAGERS: Jim Blanck, Maine Forest Service;

Brian Kent, Kent Associates Planning and Design; Gardiner, Maine

LEAD AUTHOR: Morten Moesswilde, Maine Forest Service

EDITOR: Alison Truesdale, LandForms; Brunswick, Maine

ILLUSTRATIONS: Brian Kent

GRAPHIC DESIGN: Mahan Graphics, Bath, Maine

FIELD ADVISORS: Michael St. Peter and Yves Levesque, Certified Logger Program

PHOTOS: Brian Kent; Michael St. Peter; Dave Welsch; Steve Gettle; Andy Whitman; Maine Forest Service.

Partial funding for this project was provided by a Maine Outdoor Heritage Fund grant and funds from Maine's Coastal Zone Program. The manual was developed and printed under appropriation #014.04A.0240.552.

The Maine Forest Service would like to thank the hundreds of loggers, foresters, and landowners whose work in forest management and harvesting helped shape this manual. They demonstrate their professionalism every day.

3RD EDITION EDITS: Rondi Doiron, Greg Miller, Dan Jacobs, Don Mansius and Tom Gilbert.

ACKNOWLEDGEMENTS	i
SECTION 1. INTRODUCTION	1
What This Handbook Is	2
What This Handbook Is Not	2
How to Use This Manual	3
How BMPs Protect Water Quality	4
KEY ISSUE: Water Movement	5
How Harvesting Affects Water Quality	10
SECTION 2. FUNDAMENTAL BMPS	13
1. Define Objectives and Responsibilities	14
2. Pre-Harvest Planning	15
3. Anticipate Site Conditions	18
4. Control Water Flow	19
5. Minimize and Stabilize Exposed Soil	20
6. Protect the Integrity of Waterbodies	20
7. Handle Hazardous Materials Safely	21
KEY ISSUE: Filter Areas	22
KEY ISSUE: Stabilization	25
SECTION 3. BMPS FOR EVERY STAGE OF THE HARVEST	32
Stream Crossings	33
Plan Ahead	36
KEY ISSUE: Fish Passage	41
Build it Right	44
KEY ISSUE: How to Size and Install	
Bridges and Culverts	47
Maintain It	52
Close it Out Correctly	53

Wetland Crossings	54
Plan Ahead	55
Build it Right	56
Maintain It	59
Close it Out Correctly	59
Truck Roads	60
Plan Ahead	62
Build it Right	66
KEY ISSUE: Controlling the Water	68
Maintain It	72
Close it Out Correctly	73
Log Landings	74
Plan Ahead	75
Build it Right	77
Maintain It	78
Close it Out Correctly	79
Trails and Harvesting	80
Plan Ahead	81
Build it Right	84
KEY ISSUE: Water Diversions	85
Harvest It Right	87
Maintain It	88
Close it Out Correctly	89
Hazardous Materials	90
Fuels, Oil, and Coolants	91
Temporary Sand and Salt Storage Areas	92
Pesticide Use	93
 SECTION 4. FOR MORE INFORMATION	 94
Sources of Technical Assistance	94
References	95

SECTION 1 INTRODUCTION



INTRODUCTION

WHAT THIS HANDBOOK IS

This handbook describes Best Management Practices, or BMPs, for protecting water quality during forest harvests. The BMPs include a wide range of recommended techniques that can be used before, during, and after logging operations. Loggers, foresters, and scientists from Maine and other states have developed these techniques from their own practical experience and research.

This handbook is for woodlot owners, loggers, foresters, and others involved in harvest operations. The handbook will help you understand, identify, design, and implement water quality protection measures while meeting other harvest objectives.

This book will help you to:

- Understand how BMPs work. It is more effective, cheaper, and easier to prevent pollution than to fix problems after they occur. When you understand the principles behind BMP techniques, you will be able to anticipate and prevent problems before they end up costing you time and money.
- Decide which BMPs to use. Harvest sites can vary significantly, and different techniques are appropriate to different sites. By applying BMP principles, you will be able to use your own judgment and this handbook to select the most appropriate and effective BMPs for a particular site.

WHAT THIS HANDBOOK IS NOT

BMPs are not the same as regulations. Best Management Practices are recommended procedures that, when used appropriately, will result in the greatest protection of the environment over the course of the operation. Regulations prescribe required, minimally acceptable practices. Some BMPs may be mandatory in some situations; others may be voluntary, depending on the site and local and state laws.

This handbook is not a complete how-to manual for installing BMPs. Please see “Section 4: For More Information” for titles of other documents that provide technical details on BMP installation.



This handbook focuses on water quality BMPs. There are BMPs that protect wildlife habitat, soil integrity and productivity, aesthetics, and other aspects of the forests. Although these values are important, they are not the focus of this manual.

HOW TO USE THIS MANUAL

In order to decide how and when to use BMPs, it's important to understand how they work to protect water quality. "Section 1: What is Water Quality?" explains different characteristics of water quality, how harvesting practices can affect them, and where it is most critical to use BMPs.

"Section 2: Fundamental BMPs" discusses fundamental BMP principles and key steps toward the overall goal of protecting water quality. These principles give you an overview of the most important things to keep in mind before, during, and after a harvest.

"Section 3: BMPs for Every Stage" lists specific BMPs for stream crossings, truck roads, log landings, skid trails, and harvesting areas. Under each of these headings is a discussion of the planning, construction, maintenance, and closeout BMPs applicable to that topic.

Throughout the manual, you will also find  signs that will alert you to potential legal requirements.  signs will point out important topics that shouldn't be overlooked. Each section is color-coded on the edge of the page to make it easier for you to find information about a specific topic.



HOW BMPs PROTECT WATER QUALITY

WHAT IS WATER QUALITY?

Forest areas in and around waterbodies are complex systems and provide habitat for a wide range of plants and animals. These forest areas, and the waterbodies in them, are the setting for different processes that provide food, water, shelter, breeding space, and other needs. For our purposes, “water quality” refers to the characteristics of water in nature that support life. These include the natural chemical, physical, and biological aspects of streams, rivers, ponds, lakes, and non-forested wetlands. The chemical properties of water include pH, dissolved oxygen, nutrients, and the presence of chemical pollutants. The physical properties of water include such things as turbidity (how clear or cloudy the water is) and temperature. In addition, the physical characteristics and natural processes of waterbodies are important aspects of water quality. Examples include stable channels, the transport of nutrients, the volume and speed of the water, the streambed material, and sticks and logs that have fallen into streams naturally.

Forest streams, lakes, and wetlands typically have excellent water quality. Forestry operations that use best management practices can protect these waterbodies’ natural ability to support life. By preventing stream sedimentation, such operations can maintain streambed properties and the clean water that allows fish—and the aquatic insects they depend on—to feed and spawn. Leaving trees that shade and provide leaf litter to waterbodies limits changes in water temperature and chemical characteristics that could reduce the ability of some species to survive and reproduce. These are just the most commonly understood examples of how maintaining the properties of water in forests can protect aquatic habitats.

Although water quality is a complex subject, BMPs are intended as relatively simple, practical steps that protect water quality. Most BMPs in this manual address turbidity by keeping sediment out of streams. Several other BMPs preserve the physical integrity of waterbodies and their natural processes. If these issues are addressed, most other aspects of water quality will be protected, too.

KEY ISSUE


Water Movement

Maine has thousands of lakes and ponds, large areas of forested and non-forested wetland, and thousands of miles of streams and rivers. All these forest waterbodies, and the areas that drain to them, are connected by moving water. Most of the water in the forest comes from rain or snowmelt which is either absorbed into the soil, flows over the ground, or enters stream channels, flowing downhill.

WATERSHED

A **watershed** is all the land and waterbodies from which water drains to a given point. You can define a watershed for an entire lake, for a stream at a crossing site, or for a river where it reaches the ocean. Watersheds range in size from just a few acres (for a small stream), to thousands of acres (for a large river). All land is part of some watershed.

It is critical to understand where water is coming from and draining to in the watershed where logging is planned. The amount of cutting or road construction at higher elevations can affect the amount and timing of runoff at lower elevations within the same watershed. When you know where, when, and how much water flows in the harvest area, you will be able to determine the best locations for roads and trails, and what types of BMPs you will need to control water movement.

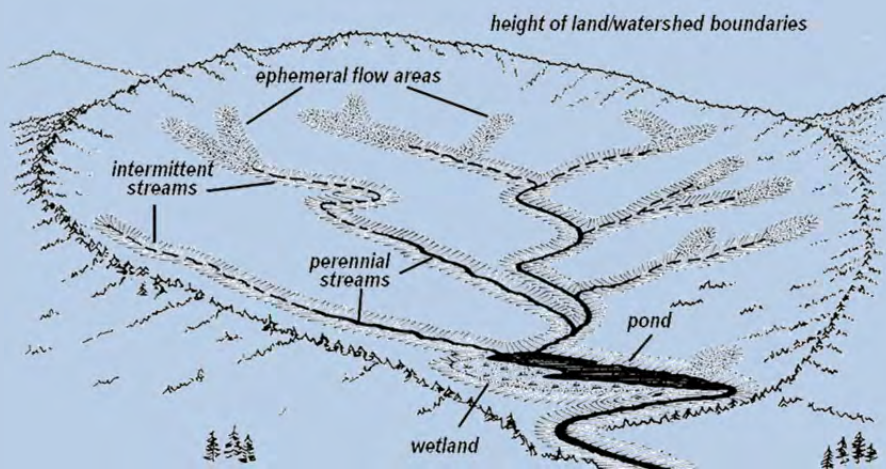

The watershed of a pond.

In this manual, “waterbodies” includes streams, rivers, lakes, ponds, and wetlands, as well as coastal areas. BMPs are recommended primarily for those areas where water is at or near the surface (streams, lakes, or wetlands), and where runoff can move directly into surface waterbodies. These waterbodies and related areas are defined and illustrated below.

EPHEMERAL FLOW AREAS

Ephemeral flow areas are small drainage areas that flow into streams, but have no defined, continuous channel. Examples are low-lying depressions, or swales with an intact forest floor. Soils in these areas may quickly become saturated during rainy periods, storms, or snowmelt. Surface water flows in these low areas over saturated soil without forming a channel. Water from ephemeral flow areas may carry sediment or other materials directly into streams. Ephemeral flow areas change in size in response to the soil and weather conditions, and are the proximate source of much of the water that enters small streams.



Ephemeral flow areas are small drainages, with no defined channel, where water flows into streams during wet periods.

STREAMS


Streams are natural water channels that:

- may flow year-round or only part of the year;
- have a defined channel and banks;
- are relatively continuous and connected with larger surface waters; and
- have a streambed where flowing water has exposed the mineral bottom of soil, sand, gravel, ledge, or rock.

Forest streams in Maine vary widely in how much water they carry, how steep they are, the shape of the streambed or channel, how much area they drain, and when they flow. **Perennial streams** flow year-round and range from small brooks to large rivers; **intermittent streams** flow only a few months of the year, and/or during wet seasons.



Streams can vary widely, but all have a defined, continuous channel, a streambed with exposed soil, and carry water at least part of the year.

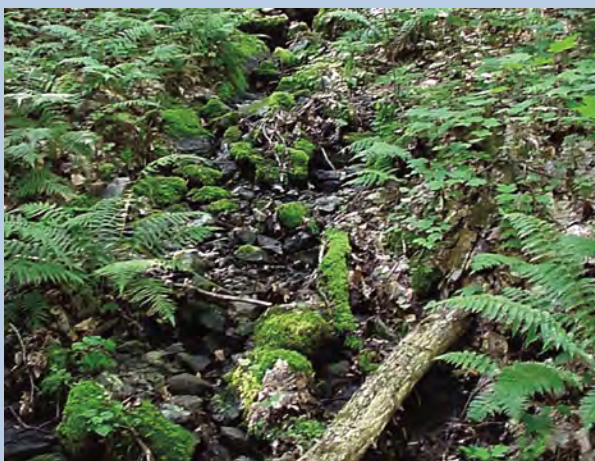

The **normal high water mark** is the place on the stream bank where the highest water levels typically occur, often during spring runoff. You can identify it from features like undercutting of the bank; a change in the type of vegetation; exposed roots that do not penetrate beyond a certain level; root scars; and water stains on stems, roots, or other vegetation.



One indication of the normal high water mark is undercutting or scouring of the bank.

WETLANDS

Wetlands are areas where soils are saturated or flooded a significant part of the year, and where water-loving plants are often found. Wetland soils usually have developed special characteristics, and often have a significant amount of water moving below the surface.


Forested wetlands are dominated (or potentially dominated) by trees taller than 20 feet. Forested wetlands vary widely in their characteristics, often have relatively little water directly at the surface, and have indistinct borders. They may require considerable expertise to identify. Forested wetlands are often managed for timber, with roads and trails crossing them.

Non-forested or **open wetlands** are not dominated by trees, though they may have some scattered trees, mostly less than 20 feet tall. They have water at or near the surface at least part of the year, and may have a more or less distinct border defined by the surrounding forest. The high water and organic content of wetland soils make them considerably weaker than upland soils and difficult to work in. Non-forested wetlands are not managed for timber, and should be crossed only when they cannot be avoided.

Vernal pools are a type of wetland, typically forested, which provide specialized habitat and deserve special attention. Separate guidelines for protecting vernal pool habitat are available from the Maine Forest Service.



forested wetlands

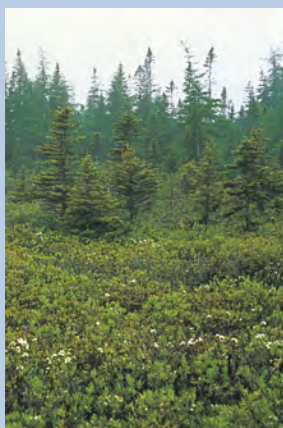

non-forested wetlands



vernal pools


HOW HARVESTING AFFECTS WATER QUALITY

HOW HARVESTING CHANGES WATER FLOW

Forest harvests can directly impact water quality by affecting how water flows through an area. In particular, constructing roads, trails, landings, or drainage systems can:

- **Reduce the soil's absorbency.** This can occur any time the forest floor is disturbed, removed, compacted, or otherwise damaged.
- **Increase soil erosion.** The opportunity for soil to be carried away by runoff increases greatly when mineral soil is exposed or fill is used.
- **Divert water flows.** Roads and trails can block or intercept water moving over or through the soil. The more water that accumulates, the greater the chance that it will form a channel and start eroding soil. Sometimes harvesting can cause streams to erode a new channel by blocking the stream's flow with logs or debris.
- **Concentrate water flows.** Roads, trails, landings, and their associated drainage structures can collect and funnel runoff, creating rills or gullies. In these situations, water erodes and transports exposed soil in its path.
- **Diminish the benefits of vegetation next to waterbodies.** Harvesting may reduce shade on the water's surface, reduce the amount of natural woody debris, or eliminate leaf litter that is an important food source for aquatic life. In addition, timber harvests that remove a significant percentage of the trees in a watershed can increase the amount of water moving through the soil into streams, and in some instances, increase flooding.

Usually, it is impossible to avoid disturbing some soil or concentrating some flowing water during a harvest. The important point to remember is to avoid these disturbances as much as possible, and to use BMPs to prevent them from resulting in sedimentation or erosion.

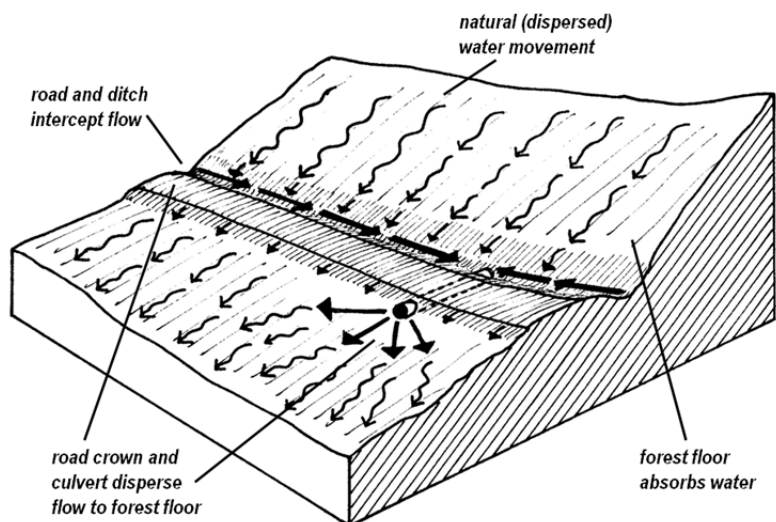


Harvesting operations intercept natural water movement and concentrate it in ditches or on the road/trail surface.

DRAINAGE SYSTEMS OR STRUCTURES are techniques used to get water off the road, trails, or landing. These can include the road crown, ditches, turnouts, cross-drainage culverts, water bars, etc.

WHAT DO BMPs DO?

BMPs are designed to mimic or protect the natural functions of forests. BMPs can absorb or disperse runoff, retain soil nutrients, filter sediment, prevent large changes in water temperature, and contribute organic material to surface waters.

- **BMPs minimize the risk of sediment and other pollutants getting into waterbodies.** Sediment—soil, dirt, silt, sand, mud—is the primary type of water pollution from forestry operations.
- **BMPs maintain the natural flow of water in streams and wetlands.** They avoid blockages, keep water flowing in its natural path, and prevent damage to the streambed and banks.
- **BMPs protect shoreland vegetation.** Some practices simply preserve enough of the forest so that it continues to function normally: shading the waterbody and stabilizing water temperatures, maintaining the soil's natural functions, and contributing organic matter that serves as habitat and a food source to aquatic plants and animals.

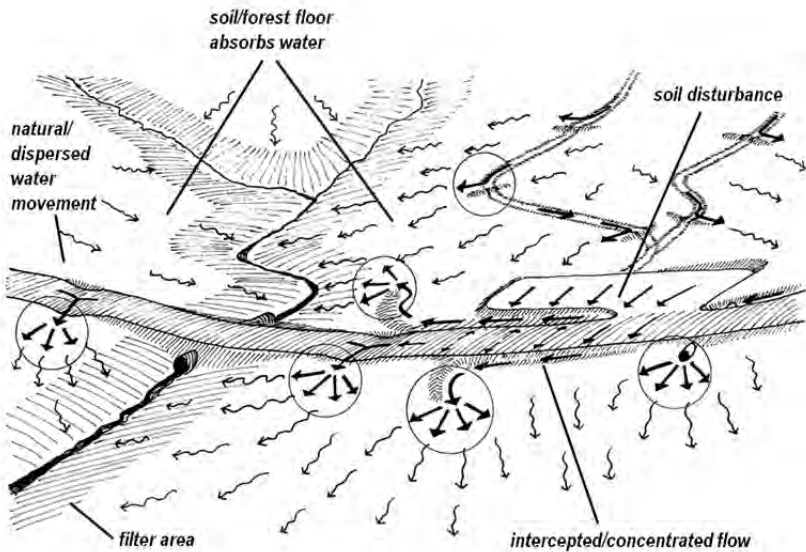

One way BMPs minimize impacts to water quality is by dispersing concentrated water flow. Circles indicate where BMPs disperse flow to the undisturbed forest floor.



FUNDAMENTAL BMPs

Most BMP techniques are based on a few basic principles. This section provides an overview of these fundamental BMPs and how they protect water quality.



Understanding these principles will enable you to select or adapt the BMPs that are the most appropriate and effective. Think of these principles as goals. Any single practice or combination of practices that effectively achieves one or more of these key goals could be considered an appropriate BMP.

1. DEFINE OBJECTIVES AND RESPONSIBILITIES

- **Determine the harvest objectives with the landowner, forester, and logger.** The first step in planning, prior to beginning work, is to communicate with everyone involved what the harvest objectives are. Discuss what's going to be cut, where, and the desired condition of the remaining forest.
- **Decide who is responsible for BMPs.** You will want to agree in advance (and in a written contract) who is responsible for implementing the BMPs, including deciding when to operate, locating streams, laying out the operation, and planning and maintaining the BMPs.
- **Find out what legal requirements apply to waterbodies in the harvest area.** The basic legal requirement in Maine is to keep pollution—including mud, silt, rock, soil, brush, or chemicals—out of the water. When working near waterbodies, find out what town, state, or federal standards apply, and if permits are needed.




Know the laws! Landowners, foresters, and loggers should determine what laws apply on a particular job. However, it is Maine landowners who are responsible by state law for preventing mud, sediment, and other pollutants from entering waterbodies. This manual does not replace legal standards, and reading it is not a substitute for

2. PRE-HARVEST PLANNING

Pre-harvest planning is a good business practice and avoids many problems. Planning will help reduce costs, make the job more efficient, protect roads and trails that will stay in place after the job, leave the job looking better, *and* protect water quality.

- Determine the harvest area limits and property boundaries on the ground. Know whose responsibility it is to identify the property boundaries correctly.** While not essential to protecting water quality, locating property boundaries is common sense and good planning. There may be survey pins, blazes, wire fences, or stone walls that mark boundaries or property corners. Forest type maps, soil or topographic maps, or aerial photos help, too.

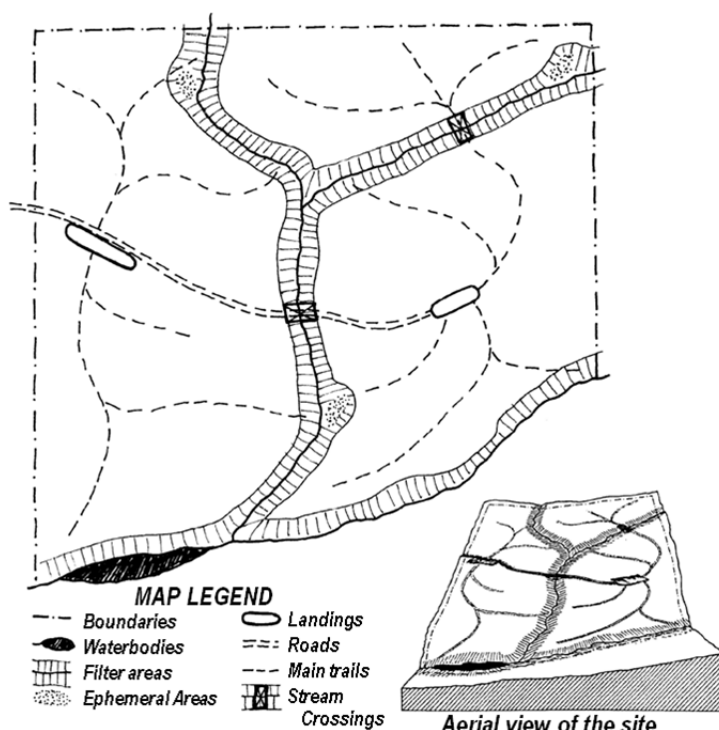

Example of a map showing planning and layout on a large lot.




When in doubt, stop! Get more information or professional advice. Call The Maine Forest Service at (800) 367-0223 (in-state only) or (207) 287-2791 for answers and referrals to professionals who can help.

- **Identify streams, lakes or ponds, wetlands, and other features on maps and on the ground.** Maps and aerial photographs can help identify features like waterbodies, steep slopes, or poorly drained soils. Walking the property to locate important features on the ground is essential. If possible, do your planning on bare ground in wet seasons when surface water is visible.
- **Identify the areas where you need BMPs.** Forest harvesting BMPs are most critical in and immediately next to waterbodies including intermittent and perennial streams, lakes or ponds, wetlands and coastal areas—wherever direct impacts to surface water may occur. You may also need to use BMPs in other areas of the watershed where flowing water could be substantially altered or carry sediment into these waterbodies.
- **Lay out the harvest operation on the ground.** Harvest planning includes determining where operational features such as roads, stream crossings, landings, cut-and-fill areas, main skid trails, and particular BMPs will be needed. While on-site, make sure everyone involved in the harvest operation is aware of the layout—especially roads, skid trails, and filter areas next to waterbodies.



There is no substitute for laying out the harvest operation on the ground.

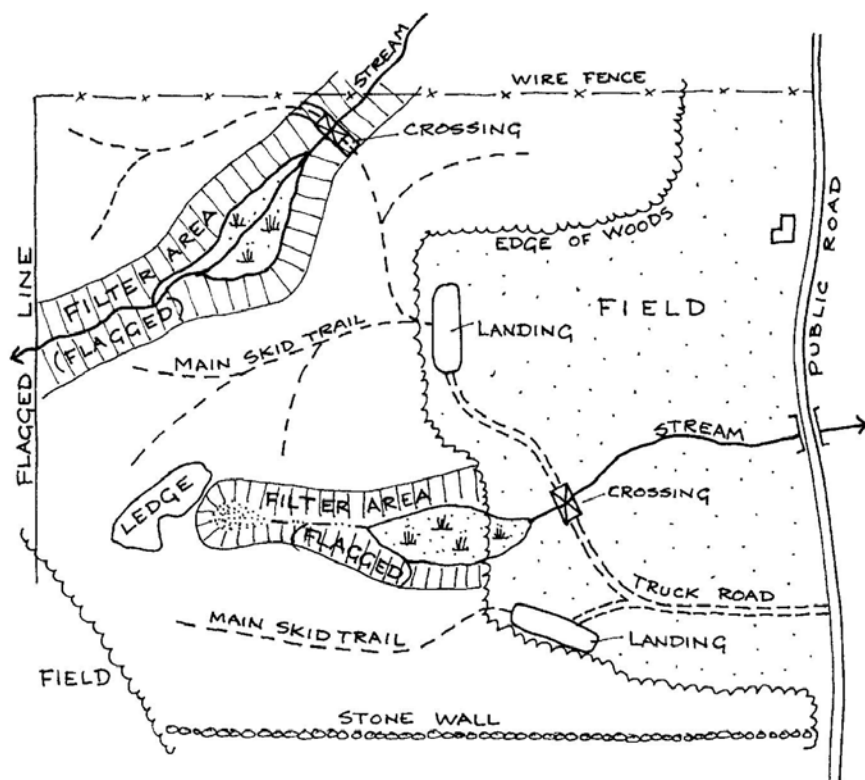

Example of a map showing planning and layout on a small lot.

- Choose BMPs that are appropriate to the site conditions.**

Most sedimentation occurs during short periods of heavy rain or snowmelt. How much rain falls during a storm, how much water streams carry, how stable the soils are, and what type of vegetation is present are all conditions that vary. BMPs that are sited, designed, and installed to anticipate adverse conditions work best.
- Decide on BMPs for the entire harvest area and for closeout before beginning work.** BMP systems need not be complicated, but they require planning across the entire harvest area and over the entire duration of the operation, including closeout. Applying BMPs in one location can sometimes solve problems elsewhere on the site, or prevent problems after the operation is complete. When you understand the natural drainage system in the watershed, often you can use a combination of simple BMPs that are more effective— and cheaper—than more complex or expensive techniques.

- **Consider the needs of future operations on the same property.** Will roads, trails and landings be used again in five years, 15 years, or longer? Are there other areas of the property that can be accessed using the same roads? If you need to access the lot in the future, plan roads and trails accordingly. Otherwise, consider restricting vehicle access after the harvest. Because of the possibility of extreme weather conditions, it is important to design and close out roads properly. Identify which structures—such as culverts—will be left in place, and which will be removed. Considering the future can avoid problems and costly solutions.

3. ANTICIPATE SITE CONDITIONS

- **Time operations appropriately.** Harvesting under frozen, snow-covered, or dry conditions can minimize the need for additional BMPs. At the same time, a range of BMPs that are appropriately chosen, installed, and maintained can extend the harvest season. Use extra caution during fall and spring when streams are high and the ground is typically wetter—you may need to use additional BMPs to control the larger volume of water.



BMPs may extend the harvest season, reduce equipment wear and the amount of mud on logs, increase skidding efficiency, and protect your investment in roads and stream crossings.



Site conditions both during and after the harvest are likely to change.

- **Determine whether previous operations in the harvest area created conditions that are impacting—or could impact—water quality.** Old roads, log landings, and skid trails can be reused or upgraded. However, in some situations, avoiding or retiring them is a better choice. Using old roads, landings, and trails may be cheaper in the short run, but may be more costly to fix or maintain later. Pre-existing conditions may also influence your choice of BMPs.
- **Plan to monitor, maintain, and adjust BMPs as needed, especially to deal with seasonal or weather-related changes.** After installation, many BMPs require maintenance or modification. Conditions—such as the amount of water flowing in streams, soil moisture, or the depth of frost—can change quickly, even with one storm. Take into account how conditions may change, and maintain or install additional BMPs as needed. Determine who will be responsible for this work. In many instances, the landowner will want to periodically check and maintain BMPs that have been installed after harvesting is done. This often prevents washouts and a loss of access while protecting water quality at the same time.

4. CONTROL WATER FLOW

- **Understand how water moves within and around the harvest area, and decide how water flow will be controlled.** Concentrated flows of water on roads, skid trails, landings, and in drainage systems develop more force and a greater ability to erode soil and carry sediment. It is easiest and most effective to control small volumes of water, before they converge and accumulate into concentrated flows.
- **Slow down runoff and spread it out.** Many BMPs work by directing small amounts of water into areas of undisturbed forest floor where it can be absorbed.



Properly sized ditches capture and slow down runoff.

- **Protect the natural movement of water through wetlands.** Wetlands play an important role in the environment by storing water in wet periods and slowly releasing it back into the surrounding ground and streams. Logging roads and trail crossings can affect the flow of water within or through a wetland. This changes how much water the wetland stores, the degree of flooding that occurs, and the rate at which water leaves the wetland. Such impacts can affect the health of the wetland and waterbodies downstream.

5. MINIMIZE AND STABILIZE EXPOSED SOIL

Limiting soil disturbance and stabilizing areas where mineral soil is exposed are among the most important BMPs for preventing erosion. These practices are most critical in and around filter areas—forest areas bordering waterbodies. A detailed discussion of filter areas, how best to work in them, and soil stabilization starts on page 22. Generally speaking, there are two major objectives:

- **Minimize disturbance of the forest floor, especially in filter areas.** The forest floor absorbs water and filters out sediment and other pollutants. Exposed soil, on the other hand, can erode very rapidly. Most of the sediment that ends up in streams near managed forests comes from exposed soil on roads, landings, and skid trails. Know where the filter areas are and how to protect their capacity to absorb and filter runoff.
- **Stabilize areas of exposed soil within filter areas and in other locations where runoff has the potential to reach filter areas.** Use BMPs during or immediately after the harvest to prevent exposed soil or fill from eroding. These techniques and materials can be used near waterbodies, at stream crossings, road cut-and-fills, ditches, landings, and skid trails. In some situations, you may need to seed and/or plant vegetation in order to stabilize the soil.

6. PROTECT THE INTEGRITY OF WATERBODIES

- **Protect stream channels and banks.** Blocking or altering streams (with slash, for instance) may keep fish from swimming past the blockage. Damaged stream banks erode quickly, causing sedimentation and siltation. By protecting the physical integrity of streams, BMPs prevent these problems.
- **Leave enough shoreland vegetation to maintain water quality.** BMPs maintain the benefits that nearby trees and plants provide waterbodies. Streamside vegetation shades the water, minimizing temperature changes. Live roots stabilize the banks and maintain the soil's physical and chemical properties. Trees along the banks drop leaf litter and woody debris that supply nutrients and become habitat for plants and animals in the stream. Shoreland vegetation plays an important role in maintaining water quality.

7. HANDLE HAZARDOUS MATERIALS SAFELY



For assistance with spills of hazardous materials, call the Department of Environmental Protection's Division of Response Services office nearest you:

Augusta (207) 287-7688

Bangor (207) 941-4570

Presque Isle (207) 764-0477

Portland (207) 822-6300

In an emergency, call

(800) 482-0777 (oils/fuels)

(800) 452-4664 (other chemicals)

- **Be prepared for any emergency.** Keep an emergency response kit and contact information at the site for fuel, oil, or chemical spills. Remember that fertilizers, herbicides, pesticides, and road chemicals (calcium chloride, road salt, etc.) are hazardous materials, too. Know whom to call for help with unexpected erosion, accidents, or other emergencies. Having a backup plan and being prepared for unexpected and special situations can help avoid or minimize negative impacts to water quality. Industry groups, equipment suppliers, and local and state government agencies all have specialists available to help. Refer to "Section 4. For More Information" on page 94 for agency names, addresses, and telephone numbers.
- **Use and store hazardous materials properly.** The best way to avoid accidental spills of hazardous materials is to store and handle them so that the chance of these types of emergencies occurring is minimized. You'll find several BMPs in this manual that describe how to do this, starting on page 90.


KEY ISSUE

Filter Areas

Filter areas, broadly speaking, are forested areas bordering waterbodies that provide important functions, especially filtering sediment and debris from runoff and preventing pollutants from reaching waterbodies. Filter areas have several components.

- The **banks** of streams (or other waterbodies) protect and contain the water channel.
- The **forest floor**—especially the leaf litter, woody debris, and organic soil layer—absorbs and filters water as it moves over and through the soil.
- **Trees and other vegetation** shade the water (minimizing changes in water temperature), stabilize the banks, and add woody debris and organic matter to the water and forest floor.

Limiting impacts to these components within a minimum distance from the waterbody (depending on slope) typically maintains these benefits and protects water quality.

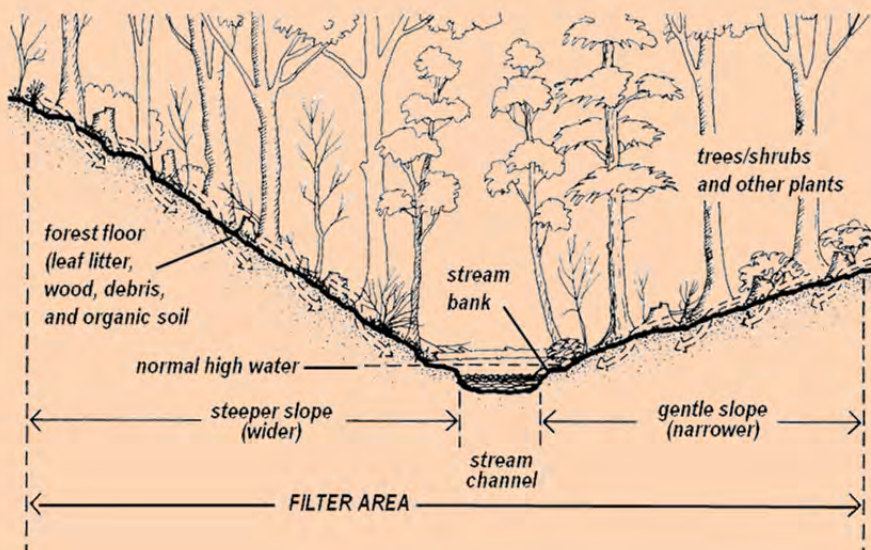

WORKING IN FILTER AREAS

Forested filter areas are not “no-harvest” zones; you can often cut within them. You may also use logging equipment in filter areas if the forest floor is protected. However, it is important that you take extra precautions within filter areas to prevent water pollution.


Note that the filter areas described here may be wider or narrower than regulatory requirements for forestry activities.

Table A
Minimum Filter Area Width

Slope (%)	Width from High Water Mark (ft.)
0	25
10	45
20	65
30	85
40	105
50	125
60	145
70+	165

BMPs

- Determine what legal requirements you must meet when working near waterbodies.**
- Delineate filter areas next to streams, lakes and ponds, and non-forested wetlands.** Minimum recommended widths (from the normal high water mark) for filter areas appear in Table A.
- Apply BMP techniques for roads, landings and skid trails (described in later sections) when working in filter areas to:**
 - minimize damage to the stream channel and stream banks;
 - protect the forest floor next to streams and other waterbodies from disturbance;
 - disperse concentrated flows of water through the area;
 - minimize or stabilize exposed soil; and
 - retain an adequate canopy of trees and/or other vegetation.

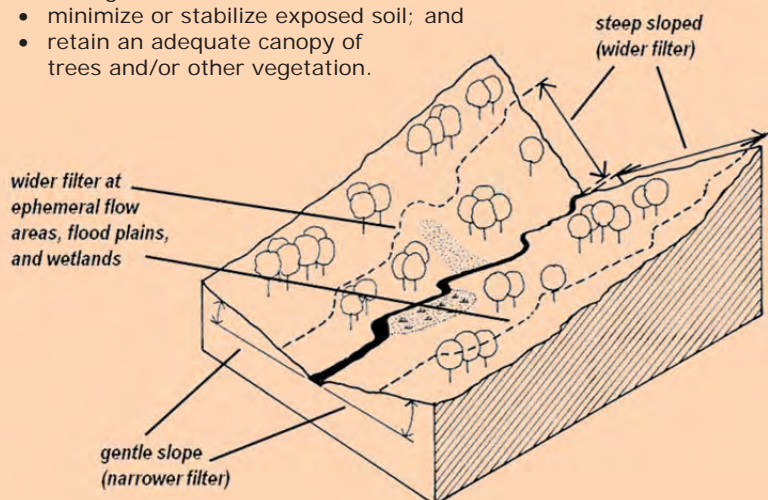

The minimum filter width varies with slope and site conditions.

- 4 Increase the width of the filter area and install more BMPs when local conditions call for it.** The recommended minimum filter area widths are based on the ability of the undisturbed forest floor to absorb water and filter sediment. The actual width needed for the filter area to be effective may be greater than the minimums listed in Table A, depending on the site conditions and planned activity. Examples of situations where it is best to designate a filter area wider than that stated in Table A include:

- **Ephemeral flow areas next to waterbodies.** Water from ephemeral flow areas may carry sediment or other materials directly into streams (especially during wetter seasons).

- **Forested wetlands and floodplains next to waterbodies.** Typically, these are wetter, weaker soils. They are more likely to develop ruts and produce rapid runoff into nearby waterbodies.

- **Water diversions that concentrate flow.** Culverts, ditches, and other drainage structures may increase the amount of water flowing into the filter area. They could also create a new channel through the filter area, reducing its effectiveness. In these cases, increasing the filter area width and making sure the drainage structures and BMPs are properly installed will help disperse the water.

- **Some stand conditions.** Some sites may warrant wider filter areas to maintain the wind-firmness of the stand or provide adequate shade on the waterbody.



Forest harvesting operations in both non-forested and forested wetlands may have legal requirements. However, the definitions of forested and non-forested wetlands vary in different federal, state, and local laws. Forestry activities may be exempt in some cases, but not in all. Know which law applies to your situation.

KEY ISSUE

Stabilization**STABILIZING EXPOSED SOIL**

Stabilizing exposed soil is most important where sediment can be carried to waterbodies. Different materials may be used to reduce erosion on exposed soils. Temporary materials are often ones that will rot and/or that will be replaced by natural vegetation. Permanent stabilization is provided by long-lasting, sturdy vegetation, stone or artificial materials designed to withstand the force of moving water. Often, stabilization materials are used in combination with each other, providing both immediate, temporary stabilization and permanent revegetation.

TEMPORARY MATERIALS

Hay or **straw mulch** can help minimize soil movement, and usually lasts one or two seasons, holding the soil until the natural vegetation grows back. Mulch is often used after seeding exposed soil. Hay and straw are not effective in areas of concentrated flows. Be aware that hay mulch typically contains non-native grass seed, while straw does not.

- When mulching exposed soil with hay or straw, use enough mulch to cover the soil completely or nearly completely. A common guide is approximately 90 lbs of mulch per 1,000 square feet (or about 2 square bales for a 30 x 30 foot area). On steep slopes (greater than 4:1 or 25%) or exposed windy sites, it may be necessary to anchor the mulch with staples, netting, or twine.



Hay mulch on a landing.

Brush, slash, and tops from harvesting are often readily available, and are an excellent means of stabilizing exposed soils until the area revegetates naturally. Brush typically does not need to be removed except if it falls below the normal high water mark of waterbodies.

- Use brush on trails that could erode and deliver sediment to streams. Wherever possible, put brush down before the soil becomes disturbed and the soil exposed. The more brush, the better.
- Use brush as a berm on the lower shoulder of roads running across slopes to help stabilize exposed soil and disperse water being shed off the road.
- Use brush on landings or similar high traffic areas (if it will not present a hazard to equipment).
- Use brush at the outfall of road culverts, dips, water bars, and other drainage structures to help hold the soil and disperse concentrated runoff.



Harvesting during frozen winter conditions and putting slash in the skid trails are both excellent ways to limit soil disturbance.

Seeding grasses that will establish themselves quickly can help minimize erosion of exposed soil. Temporary seeding works best on slopes less than 4:1 (25%). The recommended grasses for temporary seeding include winter rye (110 lbs/acre), oats (80 lbs/acre), or annual ryegrass (40 lbs/acre). See “Seeding,” page 29, for instructions on how to sow seed.

Temporary erosion control blankets are available in rolls and are made of a wide variety of materials. Usually they are biodegradable. They are often used with grass seed to establish vegetation as the blankets rot. Erosion control blankets must be in contact with the soil to prevent water flowing between the blanket and the soil. On slopes greater than 4:1, blankets may need to be anchored with staples or by other means. Blankets work best in ditch and swale sections (where there is concentrated runoff) when the slopes are gentle.

PERMANENT MATERIALS

Wood chips, waste wood, or bark mulch may last several seasons, depending on the material and its depth. Occasionally, these materials are combined with soil in an erosion control mix. Spread the material to a depth of 2–6 inches, primarily on slopes less than 4:1 (25%). Wood chips, waste wood, and bark mulch are not recommended in areas of concentrated water flow or where they may be subject to wind erosion.

Permanent erosion control blankets are usually made of synthetic materials and are used in high-flow areas such as ditches.

Gravel can provide adequate stabilization, especially on travel surfaces with low slopes and little concentrated flow. Ideally, gravel used in critical areas is screened and/or washed to remove the fines.

Riprap or cobbles are larger stones used to stabilize ditches, heavily traveled areas, and areas of high flow. They are also used to armor steep slopes (up to 1.5:1 or 67%) and culvert inlets and outlets. You can use riprap in combination with erosion control blankets to prevent flowing water from undercutting steep slopes. Use very large stone in combination with smaller cobbles and/or blankets.

Permanent vegetation or revegetation is commonly used to permanently stabilize disturbed areas. Permanent vegetation may include grasses, shrubs, and/or trees. Seeding is recommended on exposed soils within filter areas, at waterbody crossings, and at similar critical sites that are not stabilized by other means. Most other areas will reseed naturally within two years, provided BMPs have been used to control the water flow.



Hay mulch holds exposed soil while grass becomes established.

Wide varieties of seed mixtures for permanent revegetation are available. Usually, they contain combinations of creeping red fescue, annual ryegrass, tall fescue, flatpea, switchgrass, bluestem, deertongue, and other species. Commercially available “Conservation Mix” is often appropriate. A typical mix consists of: creeping red fescue (40%); annual ryegrass (31%); Dutch white clover (20%); birdsfoot trefoil (5%); and hairy vetch (4%). Select a seed mixture based on:

- the site conditions;
- how quickly the soil needs to be stabilized to avoid sedimentation;
- the time of year and predictable weather conditions;
- the soil’s moisture and fertility; and
- shade conditions.

Native, non-invasive grass species are preferable if they are available and affordable.



For more detailed and site-specific recommendations, see the USDA Natural Resource Conservation Service’s guidelines for Critical Area Planting, Section IV of their Field Office Technical Guide, referenced on the inside back cover.

SEEDING

Whether you are seeding for temporary or permanent vegetation, the sowing process is the same.



Use fertilizer with care near waterbodies, and never put it directly in any waterbody.

- Prepare the seedbed (if necessary) by raking, grading, removing debris, and/or smoothing the exposed topsoil.
- Apply the seed mix immediately after preparing the seedbed, at the supplier's recommended rate (generally from 20–50 pounds per acre) by hand, seed spreader, or hydro-seeder.
- If possible, apply seed in the spring, fall, or after rain to help ensure germination.
- Consider liming and fertilizing the site before seeding, based on soil conditions, or if it is recommended by the seed supplier. Fertilizer-coated seed mixtures may also be available. A few seed types, such as legumes, require inoculants (available from the supplier) in order to become established.
- On critical areas (near waterbodies), dry soils, highly erodible sites, or sites seeded during the summer, mulch the seeded area with hay or straw.
- Do not allow vehicles or heavy foot traffic in areas that have been seeded until the cover is well established.




Seeding with grass seed will help stabilize exposed soil, often within a single growing season.

TEMPORARY SEDIMENT BARRIERS

Temporary sediment barriers such as hay bales and filter fences are used to trap sediment during the construction of roads, ditches, and BMPs until other measures, especially permanent vegetation, can be installed. Hay bales and silt fences are not intended as permanent structures and should be removed during closeout or after the site has stabilized.

HAY BALE INSTALLATION

- Excavate a trench 4 inches deep and the width of the bale;
- position the hay bales in a single row or stagger them, making sure there are no gaps between the bales where water could flow through;
- place the bales in the trench and stake with at least two stakes per bale; and
- backfill with soil on the uphill side to keep water from flowing underneath the bale.

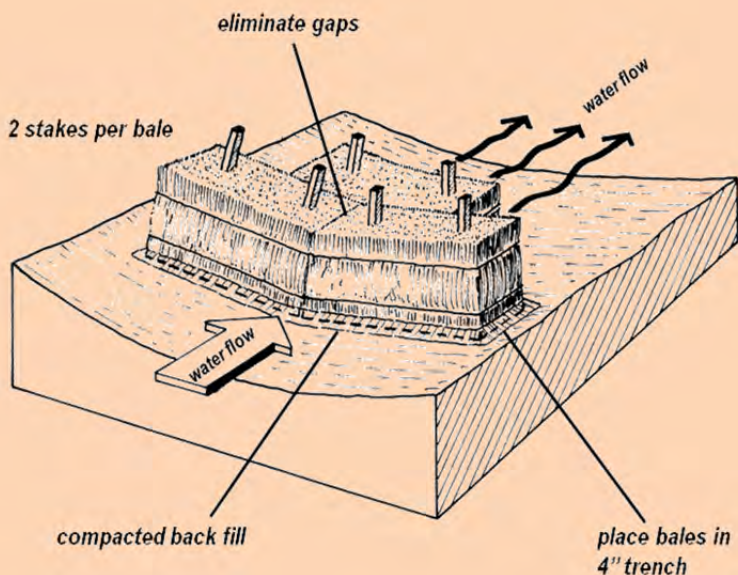


FILTER FENCE INSTALLATION

- Install a synthetic filter fence by first setting stakes at least every 3–10 feet. Three feet is needed for light fabric, while 10 feet is adequate when using extra strength fabric and/or a wire mesh support fence.
- Follow the manufacturer's recommendations and choose a filter fabric capable of handling the expected water flow. The fabric may be 15–36 inches high.
- Excavate a 4-inch deep trench upslope, along the line of stakes.
- Place an 8-inch skirt of fabric in the trench; staple the other side of the fabric to the stakes; then backfill and compact the soil.



Hay bales and filter fences are temporary measures. Remember to remove them after the harvest, or when the site has stabilized.

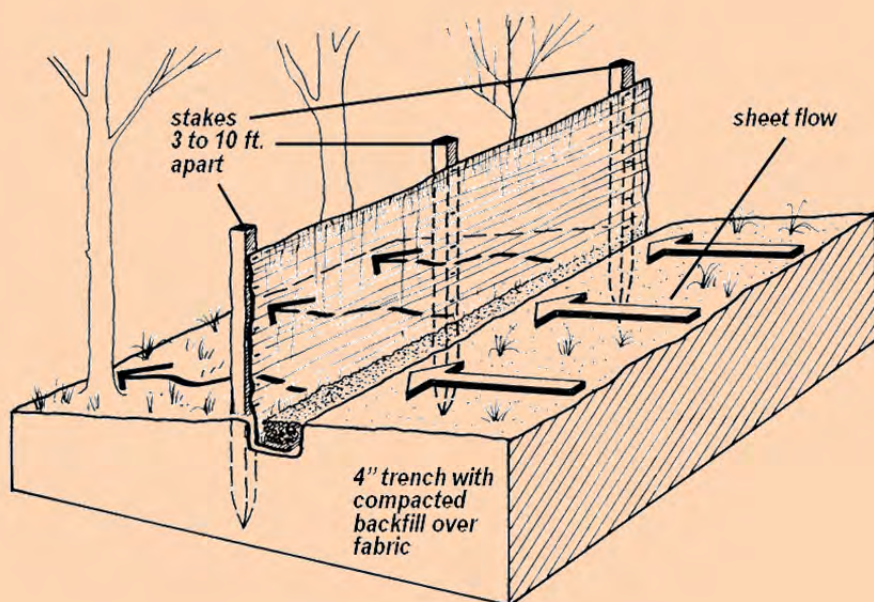

BMPs FOR EVERY STAGE OF THE HARVEST

The remaining sections of this manual cover specific Best Management Practices that are appropriate for a variety of situations or stages of a harvest operation. All are techniques that are intended as steps toward achieving one or more of the Fundamental BMPs listed in the previous section.

The specific BMPs you select in any given situation will depend on a range of factors: the site itself—including terrain, slope, soils, and location in the watershed—as well as the forest stand type, equipment, materials, and experience. The following guidelines are applicable in many situations. However, specific practices may need to be implemented in unique combinations, modified for particular circumstances or incorporate new technology or research in order to meet the objectives of the Fundamental BMPs.





HIGHEST PRIORITIES

- Minimize damage to the streambed and banks.
- Avoid altering the channel or restricting the flow of water.
- Maintain fish passage.
- Minimize and stabilize exposed soil on crossing approaches.
- Control runoff on approaches.
- Close out the crossing properly.

STREAM CROSSINGS

Stream crossings can have a significant negative impact on water quality. However, these impacts can be minimized by making sure your temporary and permanent crossings are properly installed.

Stream crossings encompass the entire section of a road or skid trail as it crosses the filter area on both sides of the stream, including:

- the channel itself;
- the stream banks; and
- the road or trail approaches (at a minimum, a length equal to the recommended width of the filter area at that point).




Some laws limit the use of "temporary" crossings to a few months, require permits, and/or require certain measures or design features.

road or trail should cross stream at appropriate location and in the shortest possible distance

minimize disturbance of stream channel and banks

install water diverting and dispersing mechanisms outside the filter area

build approaches inside the filter area that minimize disturbance

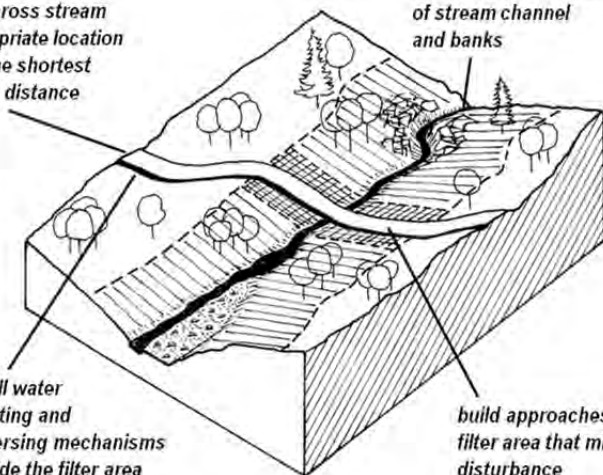

Stream crossings typically require consideration of several factors.

There are two types of crossings, temporary and permanent:

Temporary crossings are generally in place for up to several months. Stream crossings on trails used by skidders, forwarders, and other yarding and felling equipment are usually temporary.

Permanent stream crossings are intended to be in place for many years. Truck road crossings, for example, are often permanent and require careful design, installation, and long-term periodic maintenance. Permanent crossings are occasionally used for skidding or forwarding, but usually only if there are other access needs for the crossing.



A temporary bridge on a winter skid trail.



A permanent bridge.

PLAN AHEAD

Plan stream crossings before road construction, trail layout, and harvesting begin.



Crossings on streams with fish may be required to allow fish passage. See page 41 for general fish passage guidelines. Call the Maine Department of Inland Fisheries and Wildlife for help identifying streams with fish habitat at (207) 287-8000.

BMPS

- 1 Determine if a temporary or permanent crossing is needed. Select the type of crossing that best matches the site and stream characteristics, and the need for access.** If you don't need permanent access, properly installed temporary crossings may have less of an impact on water quality.

Temporary stream crossings include:

- portable bridges,
- temporary culverts or pipe arches,
- logs or pole fords, or
- brush.

Use temporary structures to keep equipment out of flowing water, to prevent sediment from entering the water, and/or to protect the banks and stream bottom. Portable, removable structures such as bridges, mats, and culverts (when they are installed without additional fill) have the advantage of being reusable.







Temporary culvert crossing of a small intermittent stream using slash.

PLAN AHEAD

You may not need to use a structure at a temporary stream crossing if sedimentation can be avoided and the stream bottom and banks will not be disturbed. For example, you can use:

- natural fords—locations where the banks and stream bottom are ledge or rocky; or
- winter crossings when frozen conditions prevent sedimentation and stream channel disturbance.

Types of temporary crossings
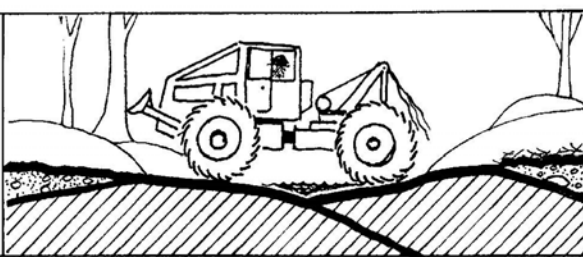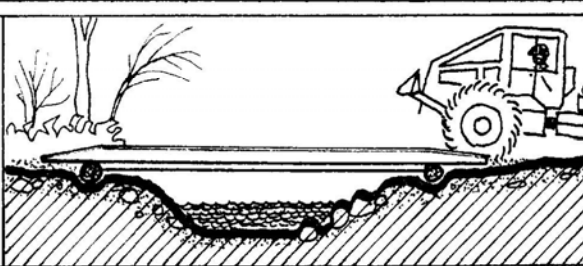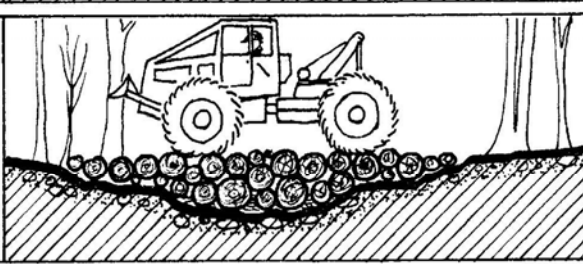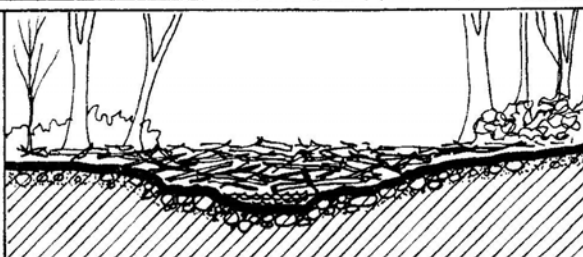
<p>NATURAL FORD — <i>stream flows over rock or ledge</i></p>	
<p>TEMPORARY/ PORTABLE BRIDGE — <i>protect/stabilize stream bank</i></p>	
<p>LOG OR POLE FORD — <i>protect bank and channel</i> — <i>maintain water flow</i> — <i>remove at closeout</i></p>	
<p>SLASH/BRUSH — <i>protect bank and channel</i> — <i>maintain stream flow</i> — <i>remove at closeout</i></p>	

PLAN AHEAD

Permanent stream crossings are most often used on haul roads, and include:

- bridges,
- culverts,
- pipe arches, or
- stone fords.

Types of permanent crossings



A permanent bridge on a truck road.



An old stone culvert still functioning.

PLAN AHEAD

BMPs

2 Select appropriate crossing locations, based on site and stream conditions.

- Minimize the number of stream crossings needed and maximize the harvest area accessed by each crossing. By locating all of the crossings during the planning stage, you may be able to reduce the number of crossings needed. Decide whether the amount of wood you gain access to justifies a crossing.
- Identify the best available sites for stream crossings. Look for:
 - relatively straight, narrow channels, and stable stream sections;
 - level or gently sloping banks and approaches (on both sides) that are stable;
 - approaches that are more or less at right angles to the channel;
 - hard stream bottom (for crossings where the structure rests on the stream bottom, e.g., pole fords or slash); and
 - areas away from important fish spawning habitat.
- Install crossings when the soil is dry or frozen and the water level is low.
- Minimize impacts to gravel or cobble streambeds where fish may spawn (especially from late fall to spring when you could harm incubating fish eggs).



See the section on “How to Size and Install Bridges and Culverts” on page 47.

PLAN AHEAD



Know what legal requirements, minimum opening sizes, and permits apply for each location and stream crossing type.

BMPs

- 3 Select a type of crossing structure that is appropriate for the stream and the adjacent terrain.** Is there a floodplain or wide, flat wetland next to the stream? These are evidence that the stream floods frequently, and you will need to plan the crossing accordingly. Install additional overflow pipes, dips, or other structures to prevent the crossing from washing out at high flows. Also, keep in mind that the type of crossing structure will affect the efficiency of water flow. Culverts may be preferred in narrow, deep gullies or on V-shaped, steep-sided channels. Bridges or box culverts are suited for wider streams with low, flat banks.
- 4 Base the opening size on the highest expected stream flows.** Size stream crossings appropriately to reduce the chance that high water levels will undermine or wash out the crossing. Washouts cause erosion and damage the stream. Moreover, repairing or replacing a bridge or culvert is a significant cost, and one that can usually be avoided (see the section on “How to Size and Install Bridges and Culverts,” page 47).
- 5 Determine the maintenance and closeout needs, and who will be responsible for these tasks.** A well-built stream crossing is an investment that minimizes your risk of causing sedimentation and can assure long-term access. Protect that investment by knowing in advance how it will be maintained and closed out.

KEY ISSUE

Fish Passage**Stream Smart Crossing**

Designing and installing stream crossings that function effectively for road infrastructure while maintaining fish passage is becoming increasingly important. Crossings designed using the **4 “Stream Smart” principles** allow for adequate capacity for high flows, minimize sedimentation of the stream and provide passage for fish and other aquatic life.



Crossings on streams with fish are required by law to allow fish passage. Call the Maine Dept. of Inland Fisheries and Wildlife for help identifying streams with fish habitat at (207) 287-8000.

Principle #1 – Span the Stream Channel

A crossing that is narrower than the natural stream channel can “pinch” the stream, causing water flow to accelerate through the crossing. This can create a barrier to fish movement, as water may move faster than a fish can swim. In addition, when accelerated water flow exits a culvert that is too narrow, it will create a scour hole. This will cause the culvert to become perched above the streambed, which also limits fish passage. Crossings that are at least as wide as the stream channel allow natural flows to be maintained through the crossing, minimizing velocity problems. In *most* cases a crossing sized to be as wide as the stream channel will also accommodate at least a 50 year flood.



A culvert that is spanning the stream channel.

Principle #2 – Set the Crossing at the Correct Elevation

Stream crossings, including closed bottom culverts and footers of open bottom structures, should be set below the elevation of the **ORIGINAL** stream channel. This is particularly important to be aware of when replacing a stream crossing, since old crossings are often set at too high an elevation. A stream crossing that has not been set at the correct elevation limits fish passage and may pond water on the upstream side, which in time may compromise the road.



Water ponded upstream of an old crossing is a good indication that the crossing is set too high.

Principle #3 – Slope Matches the Stream

Crossings should be set at the same gradient as the natural stream channel. This allows the stream to maintain its natural velocity and minimizes problems such as scour holes below the crossing.

Principle #4 – Substrate in the Crossing

Open bottom crossings such as bridges and arch culverts are open to the natural stream bottom. Properly sized and embedded closed bottom culverts can have a stream bottom redevelop in the crossing as stream bed material accumulates. Material may need to be added to culverts, particularly on steeper streams.



A culvert installed to stream smart principles that is accumulating substrate



Tip: The width of the opening for a bridge or culvert should be at least as wide as the stream channel at the normal high water mark. Sizing a crossing only based on the 10 or 25 year flood (see page 48-49) may not always accomplish this goal.

BMPs

- 1 **Minimize “velocity barriers” by maintaining natural rates of stream flow.** Culverts that constrict flows can increase water speeds beyond the swimming ability of some fish species. Design a culvert’s shape, slope, size, and outlet so that the stream’s natural rate of flow is preserved and fish can swim upstream through the culvert.
- 2 **Minimize “low-flow barriers” by maintaining adequate flows in culverts.** Multiple culverts or other designs that spread out flow or broaden the channel may result in water that is too shallow for fish to pass through, especially during summer.
- 3 **Minimize “exhaustion barriers” to fish.** Culverts that are long, steep, or provide no resting areas may tire fish enough to prevent them from passing through.
- 4 **Minimize “jump barriers”.** Culvert outlets that are set too high (“hanging culverts”) can prevent fish from entering the culvert. In addition, outlets that scour the stream channel can create fish barriers over time as the streambed is washed out and lowered.
- 5 **Minimize “debris barriers”.** Woody material that accumulates at the inlet of undersized culverts can sometimes obstruct passage. Adequately sized crossings may allow debris to pass through, but culverts require regular maintenance to prevent obstructions.
- 6 **Consider possible “behavioral barriers” when choosing the culvert type and material.** The type of culvert bottom may discourage some species of fish from passing over or near them because of specific behavioral traits.

Incorporating these principles into the design of stream crossings can reduce the likelihood of creating barriers to fish. For most stream crossing situations, fish passage can be provided by making sure that:

- structures (bridges and culverts) are at least as wide as the stream channel at normal high water mark;
- culverts are embedded slightly (5-25% of their diameter) in the stream substrate; and
- a natural stream bottom is retained or redevelops within the structure after installation.



Tip: Sediment can collect up stream of undersized stream crossings raising the stream bed elevation. When replacing existing crossings, the new culvert or footings should usually be embedded below the original stream bed elevation. See references (back cover) for more information.

BUILD IT RIGHT

Properly installed water crossings preserve water quality, protect your investment in the crossing, and reduce future maintenance costs.

ALL STREAM CROSSINGS

BMPS

- 1 **Minimize disturbance to the stream banks, channel, and streambed during installation, use, and removal.**
- 2 **Minimize and stabilize exposed soils on the approaches within the filter area.** During operations, you can stabilize the approaches with brush or other materials.
- 3 **Install diversions on the approaches to prevent channeled runoff from entering the stream from the trail or road, and to disperse it into adequate filter areas.**
- 4 **Build the narrowest roads and trails possible in the filter area and at the crossing.**
- 5 **Do not obstruct water flow or fish passage in the stream.** See the guidelines for fish passage on page 41. Install culverts with the bottom resting on or below the stream bed at the inlet and outlet.
- 6 **Minimize work during wet weather or when the soil is saturated.**

STREAM CROSSINGS

TEMPORARY CROSSINGS

BMPS

- 1 **Stabilize crossing approaches with brush or similar materials, before and during operations.**
- 2 **Protect the approaches by extending temporary bridges well beyond the stream bank.**
- 3 **Install any temporary, portable bridges so that all portions of the bridge are above the stream's normal high water mark. Keep abutments back from the banks, if possible.**



A pole ford.



A temporary bridge.

BUILD IT RIGHT

PERMANENT CROSSINGS

BMPs

- 1 If possible, build crossings when streams are dry or at low water. If considerable excavation is necessary during periods of regular or high flow, temporarily divert the water while installing the crossings.



Permanent crossings may require permits, especially if water must be diverted during installation.

- 2 Install crossings and approaches using a “no-grub zone” at least the width of the filter area, wherever possible.

- Minimize excavation on stream banks and approaches.
- Construct road approaches using fill (instead of grubbing), leaving the forest floor undisturbed, especially outside the road profile. Consider surfacing with clean gravel or stone. This will stabilize the road surface, prevent it from eroding directly into the stream, and keep mud from being tracked onto the crossing structure.
- Use geotextile and fill on unstable soils or during wet weather.
- Set abutments back from the stream’s edge.

- 3 Design bridges using solid decking or other features to minimize the amount of material that falls through the deck and into the stream.




Two types of permanent crossings.

BUILD IT RIGHT

BMPs

- 4 Road ditches should not terminate in the stream. Use a broad-based drainage dip or similar structure to divert and disperse water off the road just outside the filter area to the undisturbed forest floor.
- 5 Seed and mulch exposed soil on approaches within the filter area (outside the roadbed). This should be done during or immediately after the road installation, in spring, or in early fall—follow the recommendation of the seed supplier. See p. 29 for more information on seeding.

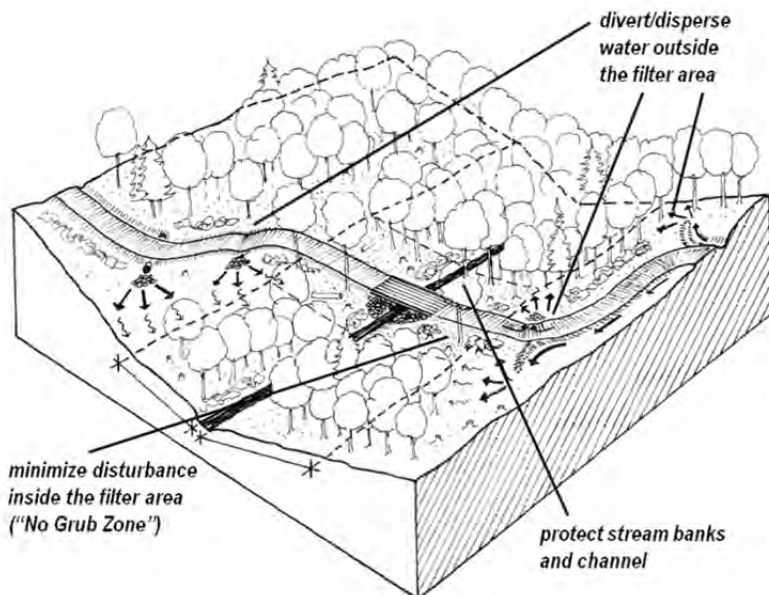

A permanent stream crossing that minimizes water quality impacts.

KEY ISSUE: HOW TO SIZE AND INSTALL *Bridges and Culverts*

Properly sizing and installing bridges and culverts in stream crossings is very important. Doing so will prevent these structures from failing or washing out, requiring expensive repairs or rebuilding. Moreover, washouts can significantly impact a stream's water quality.



Before designing bridges or culverts, know which legal standards apply and what permits may be required.

Planning a stream crossing involves selecting the best crossing location and type of crossing structure. The size of the bridge or culvert will be based on the opening size needed for the size of the stream you are crossing.

STEP 1:

Determine the degree of flooding the crossing must handle without being damaged or washed out. This will depend on what type of crossing you want and how long you anticipate the crossing to be in place. The longer a crossing is in place, the larger the flood that is likely to occur at any particular location.

Design the crossing opening to handle at least normal high water (a 1–3 year flood) for:

- temporary trail crossings in place during summer, fall, and/or winter seasons (but not during spring runoff).

Design for at least a 10-year flood event for:

- temporary trail crossings that will remain in place during spring runoff;
- temporary road crossings; and
- permanent trail or road crossings that will be regularly maintained.

A 10-YEAR FLOOD EVENT: the highest flood level a stream is likely to reach, on average, in any 10 year period.

Design for at least a 25-year flood event for:

- permanent road crossings that will not be maintained; or
- roads that will be put to bed without removing the crossing.


EXAMPLE: You need to install a crossing that will be temporary, but you won't be able to remove it until after the spring runoff. You are planning to use a round culvert.

SOLUTION: You need to design the crossing for a 10-year flood event.

STEP 2:

Determine the opening size needed to accommodate the expected flood event. The field method described here calculates opening size based on the actual stream dimensions at the crossing location.

Be sure to use streambank evidence to measure at the normal high water mark – not just the existing water level.

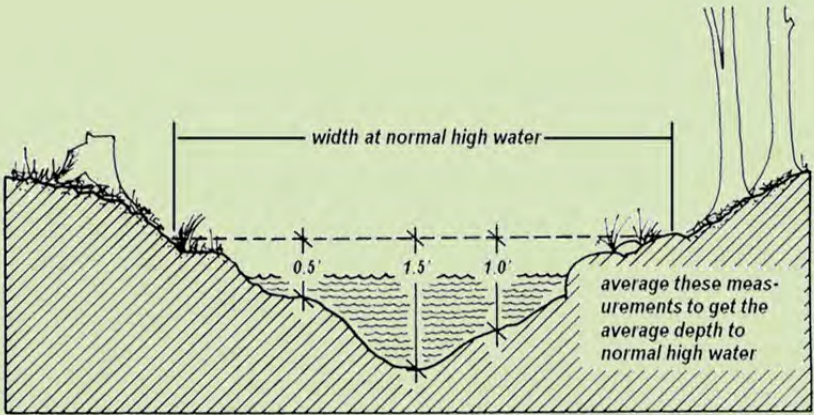

- To accommodate **normal high water** (a 1–3 year flood), multiply (width) x (the average depth at normal high water), or keep all temporary bridge components above the normal high water mark.
- For a **10-year flood event**, use Table B1, or multiply (2.5) x (width of the stream at the crossing location at normal high water) x (average depth of the stream at normal high water).

Table B1 10-year Flood Crossing Opening Size (sq. ft.)				
Stream Width*	Average stream depth* (ft.)			
ft.	0.5	1	1.5	2
1	1.25	2.5	3.75	5.0
2	2.5	5.0	7.5	10
3	3.75	7.5	11.3	15
4	5.0	10	15	20
5	6.25	12.5	18.8	25
6	7.5	15	22.5	30
* at normal high water mark Bold: bridge or arch may be preferred on these larger streams				

- For a **25-year flood event**, use Table B2, or multiply $(3.5) \times (\text{width of the stream at the crossing location at normal high water}) \times (\text{average depth of the stream at normal high water})$.

EXAMPLE: The average depth of the stream at your chosen crossing site is $(1 \text{ ft.} + 1.5 \text{ ft.} + 0.5 \text{ ft.}) / 3 = 1 \text{ ft.}$ You determine the width is 5 feet.

SOLUTION: You use Table B1 because you are designing for a 10-year flood. That table shows that the opening size at the stream crossing should be 12.5 sq. ft.

STEP 3:

Design the bridge or culvert to meet or exceed the minimum opening size.

- For bridges or box culverts**, determine a width and height that, multiplied together, produce a result that is at least as great as the square footage you determined you needed in Step 2. Bridges should be installed above the normal high water mark or higher.
- For round culverts**, select a culvert size using Table C.
 - Find the opening size in the first column that is equal to, or the next size up from the opening size you determined in Step 2.
 - Find the culvert diameter for that opening size in the second column.
 - If you plan to use more than one culvert, be sure the total opening size of all culverts adds up to the minimum opening size you determined in Step 2.

Table B2
25-year Flood
Crossing Opening Size
(sq. ft.)

Stream Width*	Average stream depth* (ft.)			
	0.5	1	1.5	2
1	1.75	3.5	5.25	7.0
2	3.5	7.0	10.5	14
3	5.25	10.5	15.8	21
4	7.0	14	21	28
5	8.75	17.5	26.3	35
6	10.5	21	31.5	42

*** at normal high water mark**

Bold: bridge or arch may be preferred on these larger streams

Table C
Culvert Diameter
And Opening Sizes

Opening size (sq. ft.)	Diameter (inches)
0.20	6
0.80	12
1.25	15
1.75	18
2.40	21
3.15	24
4.90	30
7.05	36
9.60	42
12.55	48
15.90	54
19.65	60
23.75	66
28.26	72



Tip: To provide adequate fish passage the width of the opening for a bridge or culvert should be at least as wide as the stream channel at the normal high water mark (see page 41). Sizing a crossing only based on the 10 or 25 year flood may not always accomplish this goal.

- **For pipe arches**

- calculate the required opening size as in Step 2;
- double the opening size; and
- use Table C to find the pipe arch diameter for that opening size. (The opening of pipe arches is approximately half that of round culverts of the same diameter). Make sure the diameter is wide enough to install bottomless/half circle arch footings above the normal high water mark.

EXAMPLE: You plan to install a round culvert, so you look for your required opening size of 12.5 sq. ft. in the left column of Table C.

SOLUTION: 12.5 isn't listed, but the next highest number is 12.55. The diameter size listed opposite 12.55 in the right column is 48 inches. This is the size culvert you need.

STEP 4:

Adjust the bridge or culvert size as necessary to:



- minimize disturbance to the stream channel and banks;
- allow for unrestricted normal flows; and
- allow fish to pass when water is present.

EXAMPLE: This stream has fish in it, and fish passage is required by law. To provide adequate fish passage, the culvert must span the stream.

SOLUTION: The stream was measured at 5 ft. in width. Therefore, a 60 inch culvert would be adequate to provide fish passage.

When installing permanent culverts:

- Set the culverts with the bottoms slightly below the bed of the stream, and at a 2-3% slope. Avoid “hanging” culverts where the bottom of the culvert outlet is above the low water level.
- Extend the culvert inlet and outlet 1 foot or more beyond the fill or roadbed.
- Cover with compacted backfill to a depth equal to half the culvert diameter, or at least 1 foot deep.
- Stabilize the inlet and outlet of culverts and bridges using cobbles, timber abutments, or other armoring.

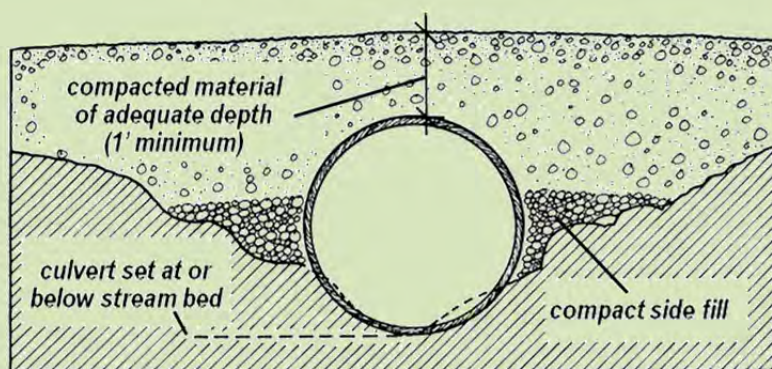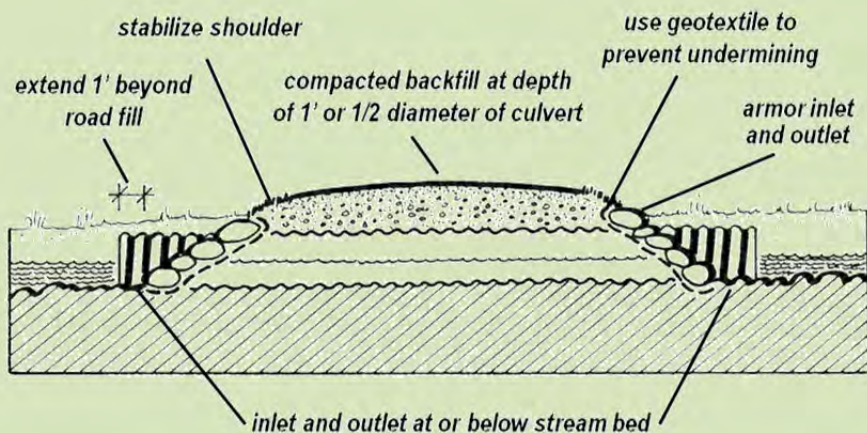

AS AN ALTERNATIVE to this field method, consider using a hydrological analysis model and/or assistance from a professional engineer, especially for permanent crossings. See the “References” section for more information.

MAINTAIN IT

ON ALL CROSSINGS

BMPs

- 1 **Do not allow ditches to terminate directly into the stream or the filter area.** Runoff should be dispersed onto the undisturbed forest floor before it reaches the filter area.
- 2 **Make sure the approaches within the filter area are stabilized**
- 3 (see “Stabilizing Exposed Soil” on page 25).
- 4 **When grading or rock-raking approaches, do not drag material onto the crossing.**

TEMPORARY CROSSINGS

BMPs

- 1 **Stabilize the soil on stream crossing approaches in the filter area by using slash, brush, or log corduroy.**
- 2 **If there is rutting or channeling on the crossing approaches, disperse the water flow to an undisturbed, stable filter area using water bars or similar structures.**

PERMANENT CROSSINGS

BMPs

- 1 **Establish a regular monitoring and maintenance schedule for permanent stream crossings.**
- 2 **Make sure the crossing approaches are not carrying sediment to the stream.** Maintain and restabilize them as needed.
- 3 **See if the abutments, armoring, and bank stabilization measures are being undermined or damaged, and replace or repair them as necessary.** Severe undermining may indicate a poor location for the crossing, improper sizing, or incorrect installation, and can only be corrected by relocating or redesigning the crossing.
- 4 **Periodically remove debris and other materials that may block or constrict the culvert or bridge opening.** Using 15"–18" minimum diameter culverts greatly reduces the need for this maintenance work.

CLOSE IT OUT CORRECTLY

Closeout BMPs will help minimize future damage at both permanent and temporary crossing sites.

BMPs

- 1 **As a first step, identify the long-term monitoring and maintenance needs appropriate to the harvest site and communicate these to the landowner, forester, and logger.** Determine who will be responsible for these tasks.
- 2 **Remove temporary structures, slash, and/or other materials from below the normal high water mark when the crossing is no longer used.** Do not remove debris that has fallen into the stream naturally.
- 3 **Leave brush in place on the approaches and banks (above the normal high water mark) to ensure ongoing stabilization when you closeout.**
- 4 **Remove bed logs used for temporary bridges unless doing so may cause more disturbance.**
- 5 **After the harvest, stabilize the remaining exposed soil on the approaches in the filter area.** Use additional brush, hay, or other materials. If large areas are disturbed, spread grass seed and mulch.



Closeout of a temporary stream crossing.



HIGHEST PRIORITIES

- Avoid crossing wetlands whenever possible.
- Minimize soil disturbance, soil movement, and sedimentation.
- Maintain water movement, especially in the top 12 inches of soil.

WETLAND CROSSINGS

Wetlands are areas where soils are saturated or flooded for a significant part of the year, where water-loving plants are found, and where soils have taken on special characteristics (see page 9 for more discussion and examples of wetlands). The large amount of water and organic matter in wetland soils make them difficult to work in. Wetland soils have low weight-bearing capacity and therefore are weaker than upland soils. In addition, it is common for water to be moving through the soil near the surface.

BMPs in wetlands help minimize two primary impacts: sedimentation and the alteration of water flow through the wetland soils. Sedimentation is primarily a concern for non-forested wetlands. Sedimentation in forested wetlands is somewhat less of an issue when there are no other waterbodies flowing through them. Several wetland BMPs provide ways to increase the strength, or bearing capacity, of the soil (minimizing rutting) and to maintain water movement through the wetland soil.

PLAN AHEAD

BMPs

- 1 **Construct permanent wetland crossings only if there is no reasonable alternative.** Can the wetland crossing be avoided by rerouting the road or trail?
- 2 **Get assistance from a professional engineer or licensed forester if you need to construct permanent roads in non-forested wetlands.** These professionals can minimize your costs as well as the impacts on water quality.
- 3 **Avoid building winter crossings in areas with moving water that does not freeze well.**
- 4 **Design wetland crossings that will remain stable and will not restrict water flow during wet periods, especially at spring high water.**
- 5 **Determine the maintenance and closeout needs, and who will be responsible for these tasks.**

BUILD IT RIGHT

BMPS

1 Minimize the length and width of the road or trail within the wetland.

2 Temporary crossings are preferred. Use wooden mats, log corduroy, or similar structures to cross wetlands.

3 Stabilize the approaches to non-forested wetland crossings, and the road and trail surfaces within the wetland itself. The approaches should be stabilized out to the edge of the filter area. Filter areas around non-forested wetlands begin at the border between non-forested and forested areas (to the degree that it can be identified). See page 25 for more information on soil stabilization.

4 Filter areas within forested wetlands need to be stabilized too. In these cases, the filter area is based on the location of streams that flow through the wetlands.



Soil disturbance, fill, and other alterations in wetlands (both forested and non-forested) may require permits from one or more government agencies. Call the Maine Forest Service first at (800) 367-0223 (in state only), or (207) 287-2791. They can refer you to the appropriate agencies.



Wetland culverts allow for cross drainage if the road fill does not.

BUILD IT RIGHT

TEMPORARY CROSSINGS

BMPs

- 1 Cross wetlands on frozen ground if possible.
- 2 Use brush, if necessary, to increase the soil's bearing capacity.
- 3 Avoid rutting as much as possible.




Log corduroy used for a skid trail across a wet area.

BUILD IT RIGHT

PERMANENT CROSSINGS

BMPs

- 1 Use road base materials such as waste wood, poles, corduroy, or large stone that permit water to flow through the road's sub-base. If necessary, use these materials in combination with geotextiles to keep the different layers of road material separate or to isolate the wet soils. This will increase the bearing capacity of the road so it can stand up to heavier loads and traffic.

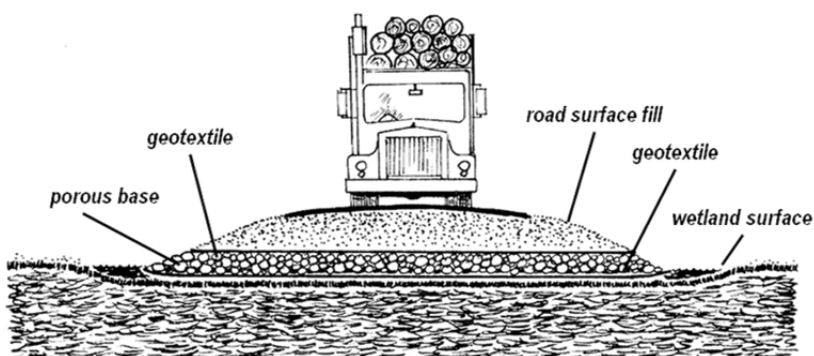

Use geotextile to keep fill from mixing with the wetland soil


BMPs

- 2 Limit excavation and other disturbances to the organic mat and the soil. If you can maintain the natural water flow without ditching, do so.

BUILD IT RIGHT

BMPs

- 3 If the drainage through the road base is not adequate (if the road is damming water), install cross-draining culverts or other structures to allow water to flow through.

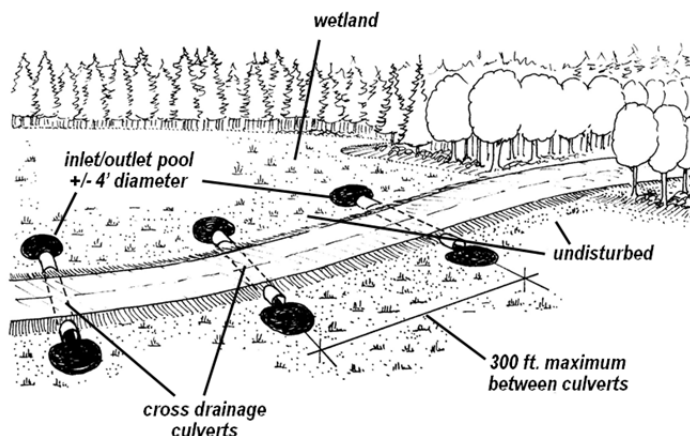

BMPs

- 4 Use side ditches, parallel to the road, only when they are needed to collect flowing surface and subsurface water. Disperse the water to undisturbed areas.

MAINTAIN IT

BMPs

- 1 Use temporary crossings when the ground is frozen. Pack or plow the snow to help freeze the ground.
- 2 Keep cross drainage structures functioning by clearing debris that can plug them.
- 3 Whenever possible, use equipment with wide tires, tracks, or other features that distribute the weight.

CLOSE IT OUT CORRECTLY

BMPs

- 1 Identify the long-term monitoring and maintenance needs appropriate to the harvest site and communicate these to the landowner, forester, and logger.
- 2 After harvesting, remove wooden mats, log corduroy, or similar temporary structures used to cross non-forested wetlands.



HIGHEST PRIORITIES

- Construct new roads outside of filter areas, except at stream and wetland crossings.
- Where you must cross filter areas or wetlands, minimize the length of road.
- Keep water off the road with drainage systems that are well designed and maintained.
- Divert and disperse runoff onto undisturbed forest floor outside filter areas.

TRUCK ROADS

This section contains BMPs for roads used primarily for hauling wood from the landing by truck. The design, materials, specifications, and use of these roads vary widely, but they are all referred to as “truck roads” in this section, whether it is a short 100-foot spur, or an extensive road system.



BMPs for truck roads are critical for protecting water quality in and around filter areas, and for minimizing runoff.

The construction and use of truck roads can sometimes cause significant water quality problems. Road construction may alter the flow of water over and through the ground. Truck roads expose soil over a large area and get heavy use. They often require permanent stream crossings. All of these factors pose risks to the quality of nearby waterbodies.

However, most negative impacts on water quality can be avoided if truck roads are designed, constructed, and maintained properly.

Well-planned and well-built roads make sense both economically, and environmentally. Road BMPs:

- extend the seasons the road can be used;
- reduce road wear and maintenance costs;
- enable trucks to haul heavier loads;
- lower truck maintenance costs;
- reduce travel time; and
- protect water quality during and after harvests.



PLAN AHEAD

ALL TRUCK ROADS

BMPs

- 1 Determine the size and type of road needed.** Plan roads that are appropriate to the immediate harvest needs and the long-term forest management objectives. Consider the harvest characteristics (the volume and types of products, terrain and soils), all current uses of the road, and other features of the property (the shape of the lot, proximity to neighboring lots, and long-term management plans).
- 2 Identify the future forest management uses of the road, after the current operation is closed out.** Is the road likely to be used for precommercial operations like pruning? Is access for fire suppression important? How often will the road be used for harvesting?
- 3 Determine the maintenance and closeout needs, and who will be responsible for these tasks.**
- 4 Know the legal requirements for roads.** Are local or state permits required?

TRUCK ROADS

NEW ROADS

BMPs

- 1 Plan and design new roads that will meet your harvest needs.**
 - What size truck will be used?
 - During what season will you be cutting, and how long will the harvest last?
 - What are the safety considerations?
 - What are the long-term road uses:
 - permanent or temporary access?
 - recreation or other road uses?
 - future harvests?
- 2 Think about how you want the road to fit into the access system for the entire property. Elements to consider are:**
 - the direction of travel;
 - turnarounds;
 - entrances;
 - total road length; and
 - connections to other roads.

PLAN AHEAD

OLD ROADS

BMPs

- 1 **Determine if old roads can be reused or upgraded with minimal impacts to water quality.** Consider the road's location, the existing drainage (i.e., where does the water flow?), the potential for additional drainage, and intended uses.
- 2 **Consider relocating roads that:**
 - encroach on a filter area unnecessarily;
 - have poorly placed or unnecessary stream crossings;
 - have poor drainage; and/or
 - have unstable soils that cannot be improved (especially gullied roads, roads in ravines, or roads that collect and hold water).



In some situations, there may be laws that govern when, where, and how old roads can be upgraded. Contact the Maine Forest Service, the Maine Department of Environmental Protection, the Land Use Planning Commission, and/or the town Code Enforcement Officer for more information.

PLAN AHEAD

LOCATING AND LAYING OUT NEW ROADS

Lay out new roads so that they fit the terrain, ground conditions, and equipment you will be using. It is often helpful to use topographic maps and aerial photos for this.




These recommendations are not intended to substitute for obtaining engineering advice or abiding by regulations in the appropriate circumstances.

BMPs

1 Identify important features on maps, aerial photos, and in the field. Be sure to include:

- the boundaries of the property and the area to be harvested;
- water bodies and filter areas;
- ephemeral, wet, or poorly drained areas next to water bodies;
- existing roads, entrances, landings;
- stands; and
- terrain features such as steep slopes, flat benches, rock outcrops, gullies, bowls, and ridges.

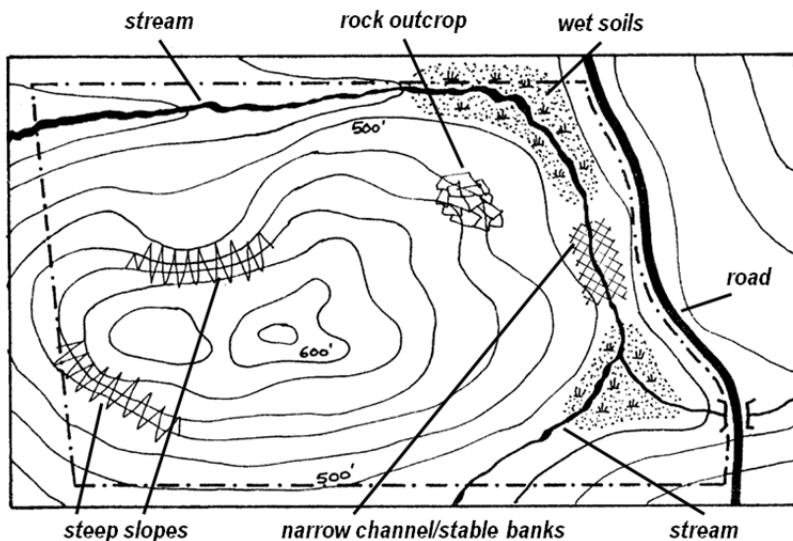


Map out important features on the ground first...

PLAN AHEAD

BMPs

- 2 Mark the harvest boundaries, water bodies, new road locations, stream crossings, and filter areas on-site.
- 3 Lay out roads where there are better-drained soils, gentle slopes (ideally 2–5%), and good stream crossing locations.
- 4 Minimize the overall road length, while still meeting operational objectives, including preferred log landing locations.
- 5 Minimize road sections where water may be difficult to drain or divert. Pay special attention to:
 - road grades greater than 10% (over 15% in mountainous terrain);
 - long, unbroken grades;
 - long, flat stretches; and
 - roads laid out straight uphill or downhill that still require ditches.
- 6 Avoid filter areas (except at appropriate stream crossing locations); ephemeral, wet, or poorly drained areas; floodplains; and steep slopes, outcrops, gullies, or ravines.

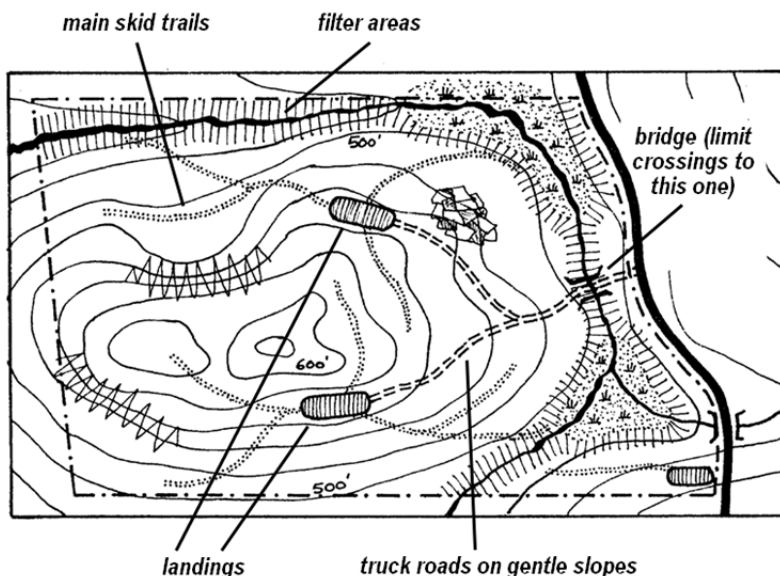

...then lay out the roads, trails, etc.

BUILD IT RIGHT

BMPs protect water quality when building new roads or upgrading old ones. Using BMPs protects the condition of, and investment in, the road.

TIMING

BMPs

- 1 **Whenever possible, construct roads during dry periods or when the ground is frozen.**
- 2 **Minimize work during heavy rains and/or wet periods.**
- 3 **Plan how and when roads built during the winter will be stabilized.**
- 4 **If possible, build roads before you intend to use them heavily so that they have time to settle and stabilize.**




CONSTRUCTION

BMPs

- 1 **Shape roads to move water off the road surface using a crown, an out-slope (this may present a safety hazard in icy conditions or on curves), or an in-slope (this will often require ditches and cross-drainage structures).**
- 2 **Use gravel, crushed stone, or other surface material (with or without geotextile) to stabilize roads, shed water, and increase the weight-bearing capacity.**
- 3 **Maintain cut and fill slopes at a natural angle of repose or less (2:1 for average soils) wherever possible.**

BUILD IT RIGHT

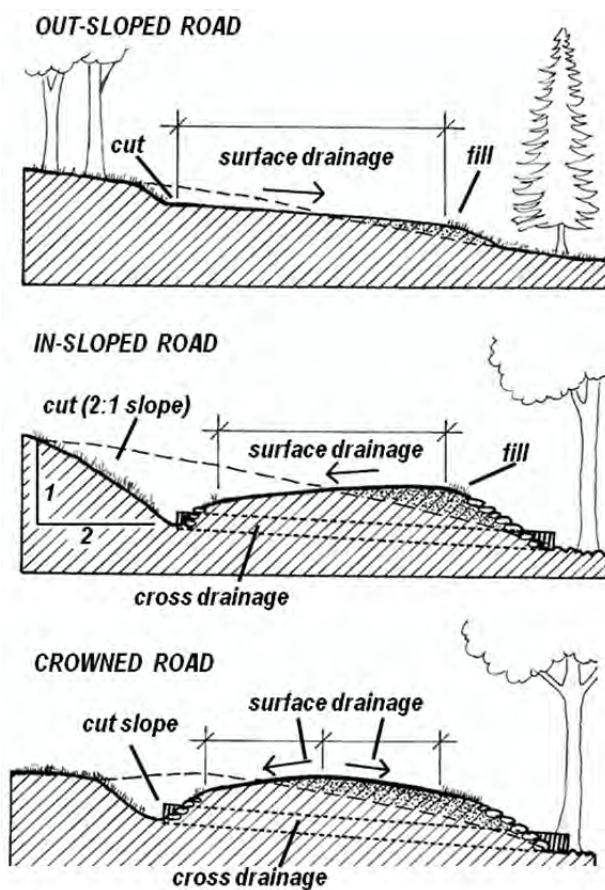

BMPs

- 4 As the construction progresses, stabilize areas of exposed soil that will receive road runoff such as cut-and-fill slopes, steep road shoulders, and erosion-prone soils in filter areas.
- 5 Use temporary sediment barriers to slow flowing water and trap sediment during construction.



KEY ISSUE

Controlling the Water

DRAINAGE AND DIVERSION STRUCTURES


Water diversions minimize the amount of run-off that reaches waterbodies. These diversions can include cross-drainage structures, ditches, turnouts, and other structures that divert water away from the road and disperse it into areas of undisturbed forest floor.

BMPs

- 1 Construct roadside ditches to carry runoff from the road surface and uphill areas. Ditches with a flattened U-shape (a broad, rounded bottom and sloping sides) are preferred—avoid straight-sided ditches.**




Grass and stone stabilized ditch

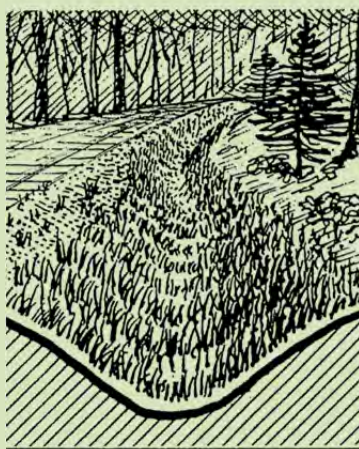

U-shaped, grass stabilized ditch

BMPs

- 2 Divert water off the road surface and away from the road using natural dips (or grade breaks), broad-based dips, culverts, turnouts, or similar techniques.**

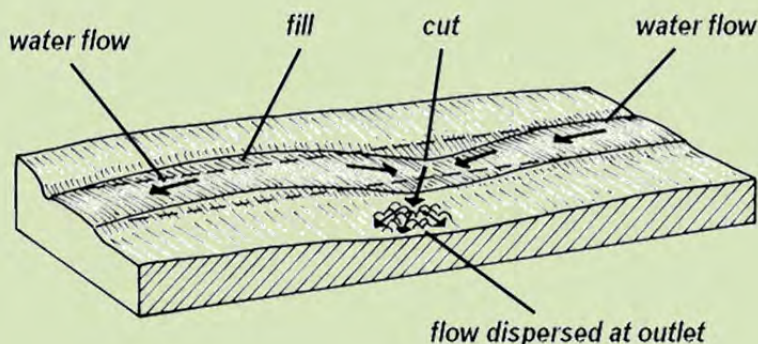


BMPs

- 3 **Space water diversions close enough together to control the volume and speed of water.** The recommended spacing varies widely, depending on the grade (steeper grades require closer spacing). Refer to Table D for the spacing most appropriate for the slope at hand. Choosing appropriate locations for the diversions may be more important than spacing on some sites.

Table D
Spacing for Water Diversion


Road Grade (%)	Spacing (ft.)
0-2	250-500
3-5	165-250
6-10	140-165
11-15	125-140
16-20	100-125
21+	<100

- 4 **The location and spacing of culverts is often more important than their diameter.** For round culverts, use at least a 15- to 18-inch diameter size to minimize plugging and maintenance.
- 5 **Disperse water flowing from the outlets of diversion structures or from downhill road shoulders using brush berms, riprap aprons, or other methods—before it enters the filter area.**
- 6 **Construct settling basins outside the filter area if water from ditches cannot be diverted off the road onto undisturbed forest floor.** Settling basins will require periodic maintenance and cleaning.

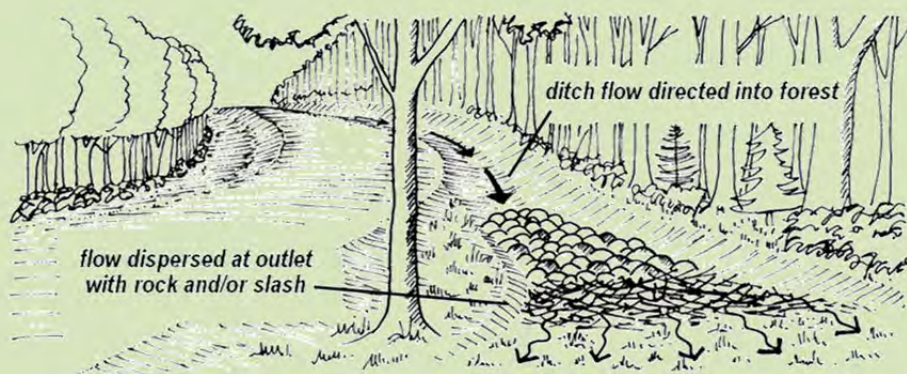

CROSS-DRAINAGE CULVERTS

Cross-drainage culverts may be metal, plastic, concrete, or wood (box culverts). Permanent or temporary culverts are most effective when installed according to the following specifications.

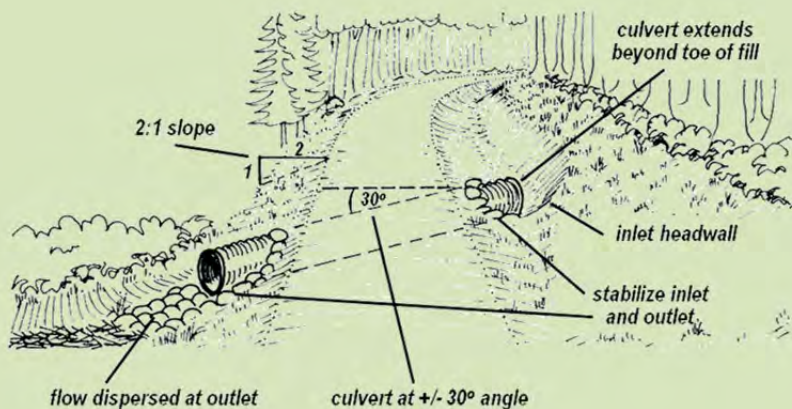


BMPS

- 1 **Install a berm or diversion headwall that directs ditch water into the culvert and protects the culvert end.** Ideally, the berm is left in place during the excavation of the ditch.



BMPs

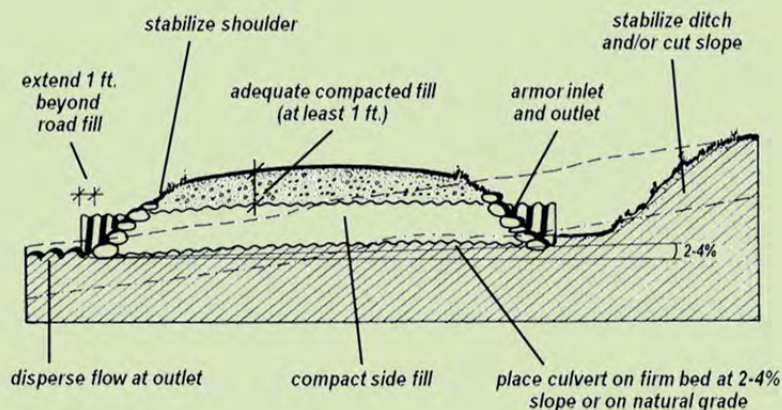

- 2 **Install culverts at a 2–4% slope and at a 30° angle to the road.**
- 3 **Stabilize areas around the inlet and outlet with riprap or other material, and extend the culvert at least 1 foot from the road fill on either end.**
- 4 **Install culverts on top of adequate bedding material (native soil or, if necessary, added fill) that is free of branches or large rocks.**
- 5 **Cover the culvert with compacted material to a depth of half the culvert diameter (or a minimum of 1 foot) or to the manufacturer's recommended specifications.**



MAINTAIN IT

Proper road maintenance protects water quality and the road by keeping the BMPs functioning. If these structures fail, significant water pollution can result, most often during severe rainfall or snowmelt. Many of the structures used to divert water from road and trail surfaces should be maintained both during and after the harvest (unless the road is closed out). Periodically removing accumulated sediment in these structures will keep them operating as they were designed to.



BMPs

- 1 Avoid using roads during wet seasons or after heavy rains.** Let wet roads dry out or freeze before reusing them.
- 2 Regrade the road surface if the crown is lost from heavy use.** This prevents water from running in the wheel ruts. Don't leave material at the road's edge. Such "false ditches" can carry water along the road edge, bypass the BMPs, and channel the water into filter areas or crossings.
- 3 Inspect ditches to make sure they have not begun to fill in, slump, or develop channels. Clear blocked ditches.**
- 4 Reshape and/or stabilize ditches as needed with erosion control mats, or by other methods.**
- 5 Stabilize exposed soils within filter areas and areas that drain directly to waterbodies. Where your original stabilization techniques are no longer effective, restabilize using additional materials (mulch, brush, and/or seeding) or other techniques.**
- 6 Keep cross-drainage culverts free of debris and accumulated sediment at their inlet and outlet. Repair the outfall protection if water is eroding the soil around it.**
- 7 Maintain the riprap or other armoring at culvert ends to prevent erosion around the pipe and to protect the ends from physical damage.**
- 8 Replace culverts that have been undermined or crushed, before they fail.**
- 9 Clean out settling basins, ponds, and check dams well before they fill up with sediment.**

CLOSE IT OUT CORRECTLY

Most erosion and sedimentation from roads happens within two years of the operation. Road closeout BMPs are best used before leaving the site for any extended period, or after the harvest is completed—even if you expect to use the road again. These BMPs prevent damage, ensuring that the road can be used again in the future. Of course, they also prevent water pollution.

BMPs

- 1 **As a first step, identify the long-term monitoring and maintenance needs appropriate to the harvest site, communicate these to the landowner, forester, and logger, and decide who will be responsible for each task.**
- 2 **Close out road sections as portions of the harvest are completed.**
- 3 **Make sure drainage structures are functioning correctly, are free of debris and accumulated sediment at their inlet and outlet, and are adequately sized for storm events.**
- 4 **Stabilize and seed exposed soils outside the travel surface, within filter areas, and in areas that drain to waterbodies.**
- 5 **Reshape and stabilize the road surface and ditches as needed.**
- 6 **Remove temporary sediment barriers such as hay bales and filter fences.**
- 7 **Divert water entering the road from skid trails, log landings, or other roads.**
- 8 **If necessary, limit or block vehicle access to prevent damage or rutting** (if this is compatible with the landowner's objectives).



If you are planning to close access roads permanently, notify the Maine Forest Service at (800) 367-0223 (instate) or (207) 287-2791.



Revegetated road ditches carry water without eroding.



HIGHEST PRIORITIES

- **Locate landings on sites with well-drained soils and gentle slopes whenever possible.**
- **Avoid locating landings in or near waterbodies (including wetlands) and filter areas.**
- **Minimize the amount of water entering the landing from roads or skid trails.**
- **Stabilize and maintain the landing surface.**

LOG LANDINGS

Log landings are the cleared areas in the harvest area where logs and other products are brought from the woods and piled, sorted, or stored before being loaded onto trucks. Log landings are sometimes referred to as log yards or decks. Landings are also where hazardous materials often are stored or used to maintain and repair equipment and roads. Please refer to the “Hazardous Materials” section on page 90 for BMPs that deal with these substances.

BMPs will help prevent negative impacts to water quality and can extend the use of log landings during—and long after—the harvest. Landings are often the most visible part of the operation. BMPs may help maintain or improve the landing’s appearance while demonstrating conscientious work to the public.

PLAN AHEAD


Log landings are busy places where a relatively large amount of soil may be exposed or disturbed. It is therefore important to locate landings away from water and maintain erosion controls.



PLAN AHEAD

BMPs

- 1 Use maps and field information to decide the best location for log landings. Preferred sites are:
 - on well-drained soils;
 - on gently sloping (not flat) ground; and
 - outside filter areas.
- 2 Keep the landing as small as possible and still meet the requirements of the equipment, the quantity and type of products, and safety.
- 3 Mark the landing boundaries before construction begins.
- 4 Lay out skid trails and roads so that water cannot flow into or out of the landing where they enter.
- 5 Plan how you will stabilize exposed soil on the landing after the job.
- 6 If landings already exist, determine if they can be reused with adequate erosion controls. If not, relocate them.

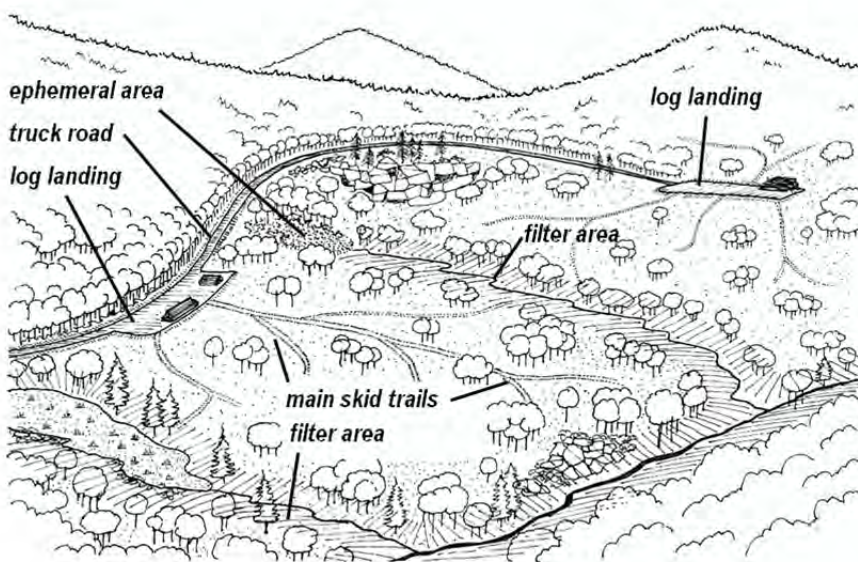

Select landing locations carefully.

BUILD IT RIGHT**BMPs**

- 1 Minimize the area of the landing that is stumped or grubbed.** Logs may sometimes be piled on relatively undisturbed soil or forest floor, within reach of loading equipment.
- 2 Install drainage ditches, water bars, or berms to drain the landing to areas of undisturbed forest floor, or to road drainage systems that can handle the amount of water coming off the landing.**
- 3 Surface the landing with wood chips, stone, or aggregate if it will help stabilize the surface and shed water.** Use these materials on top of geotextiles, if necessary.
- 4 During construction, install temporary sediment barriers (such as hay bales or silt fences) to keep newly exposed soil from entering flowing water and filter areas.** See page 30 for more information on temporary sediment barriers.



Slash and logging debris can help stabilize exposed soil on log landings.

MAINTAIN IT

BMPs

- 1 Maintain the landing surface to keep water from collecting or channeling.
- 2 Maintain drainage structures on roads and trails to keep water from entering the landing.
- 3 Install temporary or short-term measures (e.g., water bars) on skid trails if significant rain is likely during operations.
- 4 Allow landings to dry out after significant rainfall.



A well-maintained, well-drained landing.

CLOSE IT OUT CORRECTLY

BMPs

- 1 **As a first step, identify the long-term monitoring and maintenance needs, decide who is responsible for these tasks, and make sure everyone involved in the operation is notified.**
- 2 **Prevent water from entering or exiting the landing via roads or skid trails.** If necessary, install water bars or similar diversions to divert flowing water to the undisturbed forest floor.
- 3 **Seed, mulch, or otherwise stabilize the landing to establish a vegetative cover.** This is particularly important near waterbodies and filter areas. If the soils in the landing are severely compacted, some site preparation may be necessary before vegetation can take root.
- 4 **Limit vehicle access to the landing** (if this is compatible with the landowner's objectives).
- 5 **Remove any temporary erosion control structures such as stacked hay bales or silt fences. Make sure that permanent measures are in place.**



Seeded and mulched landing area.



HIGHEST PRIORITIES

- Minimize water channeling in trails and entering filter areas.
- Limit the amount of exposed soil.
- Leave enough vegetation to provide important natural functions within filter areas.
- Close out trails appropriately.

TRAILS AND HARVESTING

Much of the activity on a harvest operation happens on logging trails, away from truck roads and log landings. Trails may be cut for skidders, forwarders, felling machinery, and other equipment. Logging trails often require little or no excavation, and are usually temporary.

PLAN AHEAD

WORKING IN FILTER AREAS

Clearing trails and cutting trees, by themselves, may have a limited or temporary impact on water quality. However, when trails and trees are cut within a filter area, the potential for negative impacts on water quality increases.

BMPs

- 1 **Determine how much and where to cut within the filter area first; then plan your trail layout.** Limiting the harvest activity within the filter area is an important practice for protecting water quality during harvesting.
- 2 **Delineate filter areas in the field that are of appropriate width around waterbodies** (including non-forested wetlands). The size of the filter area should be based on site and stand conditions, but at least the width shown in Table A on page 23.




PLAN AHEAD

TRAIL LAYOUT

Locating and laying out skidding or forwarding trails in advance, especially main trails, can prevent problems. Consider the terrain, where the wood is, the lean of the timber, available equipment, the grade, soil conditions, skidding distance, filter areas along streams, and stream crossings. Good planning may reduce the skidding costs, and can reduce or eliminate the need for additional BMPs and structures.

BMPs

- 1 **If possible, lay out trails for winter harvests in advance when there is no snow on the ground. Ideally, lay out trails on bare ground during wet seasons.**
- 2 **Whenever possible, lay out main trails to avoid waterbodies and their associated filter areas, wet spots, seeps, and the bases of slopes.**
- 3 **Keep trails out of stream channels and off the banks of waterbodies.**
- 4 **Construct trails on the contour, if it is safe to do so.** Avoid skidding straight up and down hills. Remember that trail systems that run downhill to the landing tend to concentrate runoff.

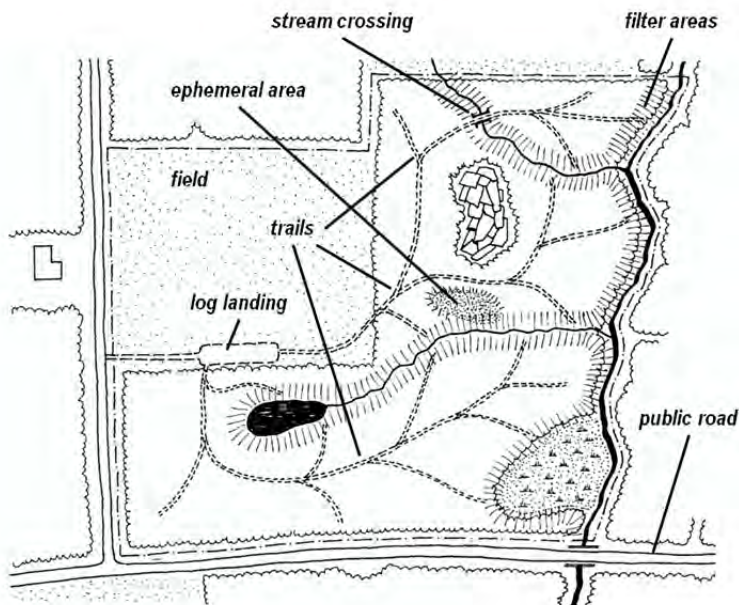


Example of small lot layout.

PLAN AHEAD

BMPs

- 5 **Plan to divert water from the trails to the undisturbed forest floor.**
- 6 **Minimize trail sections on steep slopes (>15%) wherever possible.**
- 7 **Plan to harvest during appropriate soil and weather conditions** (preferably on dry or frozen ground).
- 8 **Before you use old trails in the harvest area, consider whether water will run in them and where this water goes.**
Use existing trails only if runoff can be kept out of waterbodies by:
 - diverting water from the trail (for example, by using water bars); and
 - using brush or other materials to prevent ruts from developing or deepening.
 - If old trails are deeply rutted and the site cannot be harvested without additional rutting, consider harvesting on frozen ground and/or relocating the skid trails.

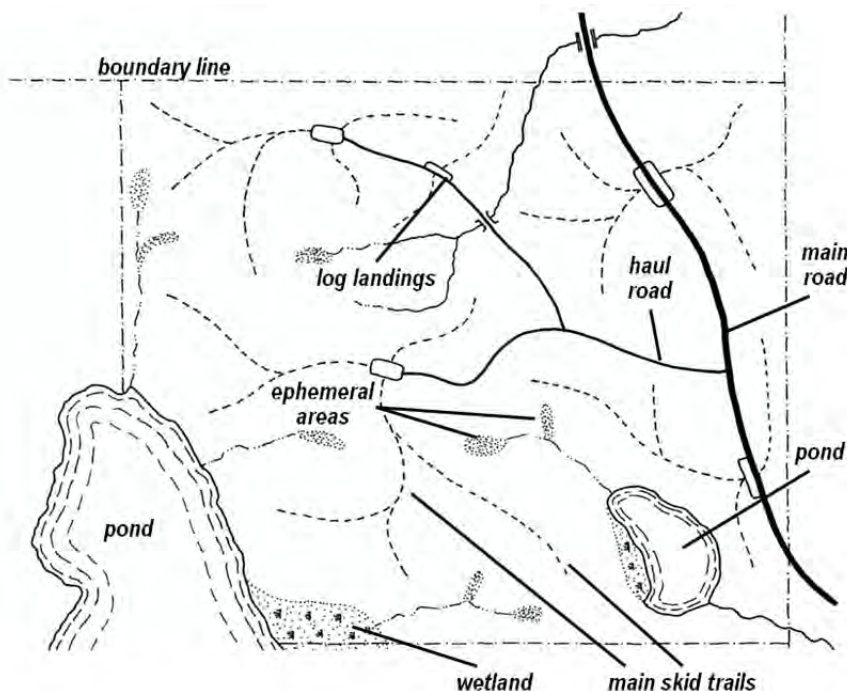

Example of large lot layout.

BUILD IT RIGHT

BMPs

- 1 Construct trails using simple structures that divert water.** Keeping water out of the trail not only prevents erosion, but also reduces equipment wear and extends the period that the trail is usable (both during and after wet weather).
- 2 If possible, limit the use of equipment in filter areas, or harvest only on frozen ground.**
- 3 Limit the amount of disturbed soil in filter areas and make sure that any sediment is filtered out before it reaches surface water.** This reduces the impact of skidding and forwarding.
- 4 Use brush to reduce the amount of ground compaction the equipment causes, to prevent soil disturbance, and to stabilize areas of exposed soil in filter areas.**



Brush on skid trails, as well as frozen ground, helps minimize soil disturbance and rutting.


KEY ISSUE

Water Diversions for Trails**BMPs**


- 1 Install water bars, skid humps, or other diversions to move water off the trail, preferably before it reaches the filter area.
- 2 Locate water bars and other diversions frequently enough to prevent water from accumulating, based on Table E. On some sites, choosing appropriate locations for diversions may be more important than their spacing.

Table E
Water Bar Spacing Guidelines

Slope (%)	Spacing (ft.)
1-2	250-400
3-5	135-250
6-10	80-135
11-15	60-80
16-20	45-60
21+	<45

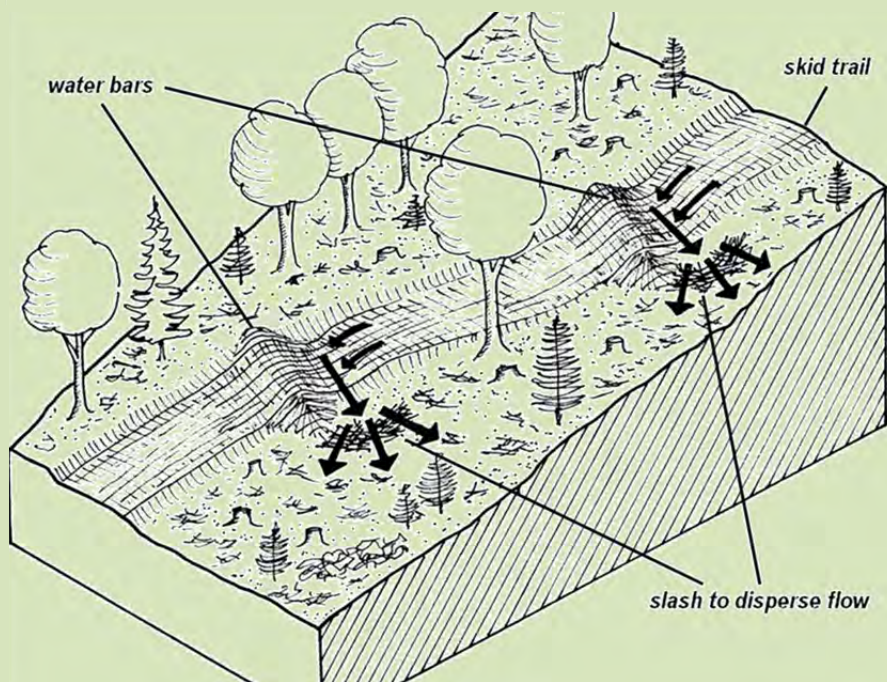

- 3 Make water bars at least 6-12 inches deep, 6-12 inches high, and install them at a 30-degree angle to the trail.
- 4 Extend the water bar inlet and outlet 1 foot or more beyond the trail to keep the diverted water from re-entering the trail.
- 5 Use the terrain to incorporate natural skid humps into the trail layout, to help divert water from the trail.
- 6 Put brush in the trail, as needed, to help disperse water.

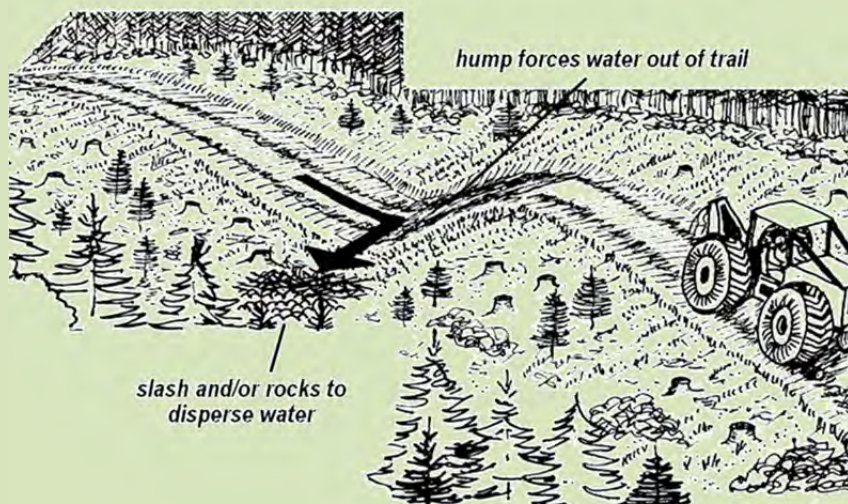

Skid hump.

HARVEST IT RIGHT


Trees and other vegetation are important components of filter areas. One of the most important BMPs for trails is to keep enough trees and other vegetation within the filter area to provide adequate shade, stabilize the banks, limit impacts to soils, and supply organic material to the water.



Harvest restrictions and required practices may apply in some jurisdictions. Call the Maine Forest Service at (800) 367-0223 in-state or (207) 287-2791 for assistance.

BMPs

- 1 **Modify the filter area width as needed to achieve the goals mentioned above.**
- 2 **Maintain a diverse species composition.**
- 3 **Retain a range of both larger- and smaller-diameter trees.**
- 4 **Leave an adequate canopy of trees and shrubs to shade the water surface and provide leaf litter.**
- 5 **Limit harvesting that removes most of the forest structure** (like clearcuts or overstory removal) **in filter areas.** Some small patch openings may be appropriate if they maintain or enhance the forest structure.
- 6 **In general, harvest less and less intensively as you get nearer to the waterbody, although harvest intensity will vary with local stand conditions.**
- 7 **Use directional felling to drop trees away from waterbodies.** Avoid dropping slash or logs into stream channels and other waterbodies.
- 8 **Remove slash that has fallen into waterbodies with a boom, winch, or by hand.** Leave any tops or stems that have fallen into the water naturally.

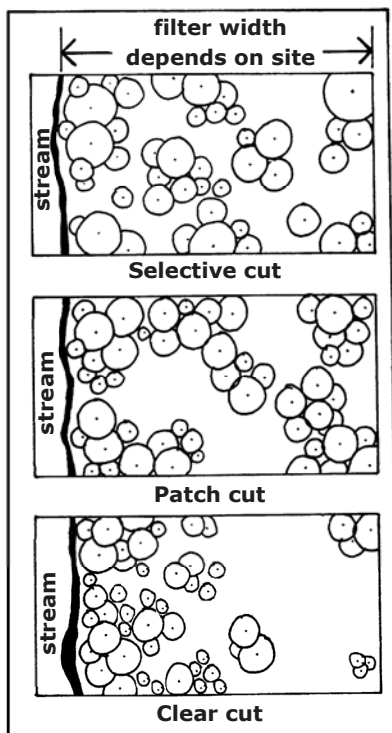

No matter the type of cut, always retain more trees near waterbodies

MAINTAIN IT

BMPs

- 1 Use brush on main trails and in filter areas to prevent ruts from developing. If ruts develop anyway, stabilize them using more brush and consider relocating to firmer ground, or waiting for drier or frozen conditions.**
- 2 Inspect and maintain water bars periodically to prevent water channels from developing in the trails.**
- 3 Stay alert to weather forecasts of significant rain or substantial thawing. Consider:**
 - limiting equipment use, working in a different area, or doing other work until the site dries up or refreezes;
 - applying brush to soft areas to distribute the equipment's weight before problems develop; and
 - installing additional temporary diversions, especially water bars, to prevent water from running in the trail.



Water bars move water out of the trail onto the forest floor.

CLOSE IT OUT CORRECTLY

Proper closeout ensures that future problems do not develop.

BMPs

- 1 **Identify the long-term monitoring and maintenance needs appropriate to the harvest site and decide who is responsible for them.** Communicate this to the landowner, forester, and logger.



A trail closed-out with water bar and seeding.

BMPs

- 2 Close out unused trails as the job progresses.
- 3 Install diversions such as water bars on trails before leaving a site permanently or suspending operations for more than a few weeks. Diversions should be installed wherever water channels could develop that will carry runoff to waterbodies or their filter areas.
- 4 Smooth rutted trails, if necessary, to keep channels from forming, and to divert runoff directly into filter areas.



HIGHEST PRIORITIES

- Know how to handle and store hazardous materials.
- Avoid leaks and spills.
- Know how to deal with accidents.


HAZARDOUS MATERIALS

FUELS, OIL AND COOLANTS

Oils, fuels, hydraulic fluids, coolants, etc. are hazardous materials commonly used at log landings. It is important to know how to handle these materials, how to avoid spills while maintaining or repairing equipment, and how to respond to accidents.

BMPs

- 1 Use appropriate containers for collecting and storing oils, fuels, coolants, or hazardous wastes.** Store these materials in designated areas and remove them from the site when they are no longer needed.
- 2 Maintain and repair all equipment outside of filter areas.** Inspect hoses, fuel trucks, and tanks for leaks, and make repairs immediately.
- 3 Have spill kits or other absorbent materials for mopping up spills readily available.** Hay or sawdust may be adequate for very small spills. Waste containment kits are available commercially and should be on hand for larger spills.
- 4 If a spill occurs, keep it from flowing off the yard and into surface waters.**
- 5 Know what state agency phone numbers to call in case of an emergency.**
- 6 Collect trash and dispose of it properly.**

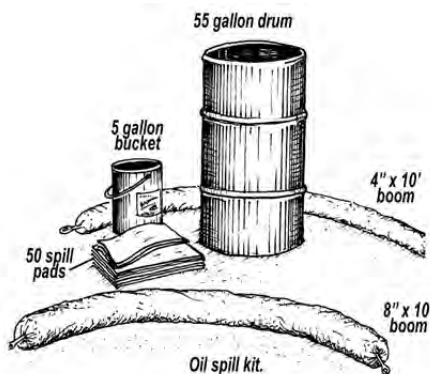

For assistance with spills of hazardous materials, call the Department of Environmental Protection's Division of Response Services office nearest you:

Augusta	(207) 287-7688
Bangor	(207) 941-4570
Presque Isle	(207) 764-0477
Portland	(207) 822-6300


In an emergency, call
(800) 482-0777 (oils/fuels)
(800) 452-4664 (other chemicals)

TEMPORARY SAND AND SALT STORAGE

Sand and salt are often necessary to maintain safe winter conditions on truck roads. The following BMPs will help minimize or eliminate the possibility that these materials will discharge from storage areas to waterbodies or into the groundwater.

BMPs

- 1 **Locate sand and salt storage areas away from waterbodies, wetlands, ephemeral flow areas, or other wet areas.** At a minimum, storage areas should be outside filter areas.
- 2 **Locate storage areas on high flat ground, near the road, and away from water diversions that direct water into road ditches.**
- 3 **Enclose the storage area with a berm high enough to contain rain and snow that may collect in the storage area.** Put a heavy impermeable liner, such as heavy plastic, on the ground where the sand and salt will be stored. Run the liner up the sides of the berm. The goal is to minimize the amount of moisture reaching the groundwater.
- 4 **Leave at least a 6-inch layer of mixed sand and salt over the liner at all times to avoid puncturing it when digging in the pile.**
- 5 **Cover the sand and salt mixture with heavy plastic when it is not being used.**
- 6 **When abandoning the site, remove the remaining sand and salt mixture and the liner, and properly dispose of them off-site.**
- 7 **Return the site to its original condition.** If necessary, seed or plant with a vegetative cover.

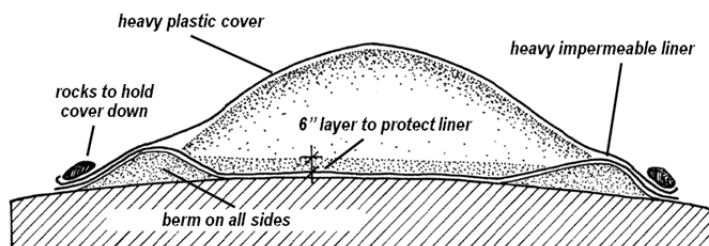

Temporary salt and sand storage pile.

PESTICIDE USE

Pesticides include chemical agents such as herbicides, insecticides, fungicides, rodenticides, or other chemicals used to control plants or animals that are interfering with forest growth. All herbicides and pesticides are regulated by state law through the Board of Pesticide Control (Maine Department of Agriculture, Conservation and Forestry).



Commercial herbicide and pesticide applicators must be licensed and certified by the Board. Landowners or managers who wish to apply herbicides and pesticides themselves on their own land should contact the Board before proceeding.

BMPs

- 1 **Maintain the required buffers between spray operations and waterbodies.**
- 2 **Apply pesticides and herbicides during favorable weather conditions.**
- 3 **Abide by all pesticide label requirements, including use rates, handling, storage, and disposal.**
- 4 **All herbicide and pesticide handling—mixing, loading, equipment cleaning, and storage—should be done away from waterbodies, outside filter areas, and away from road drainage systems.**
- 5 **Remove stored chemicals from the site when they are no longer needed.**
- 6 **Have spill kits or other absorbent materials on hand for mopping up spills.**



Refer to the Maine Board of Pesticides Control for rules and licensing requirements regarding the use of pesticides.

Phone (207) 287-2731

Website www.maine.gov/dacf/php/pesticides

FOR MORE INFORMATION

TECHNICAL ASSISTANCE

Maine Forest Service

Maine Department of Agriculture, Conservation & Forestry
22 State House Station
Augusta, ME 04333
(800) 367-0223 (in-state only), or (207) 287-2791
www.maineforestservice.org

Maine Department of Environmental Protection

17 State House Station
Augusta, ME 04333
General number: (800) 452-1942 (in-state only) or (207) 287-7688
Bureau of Land and Water Quality: (207) 287-2111

Maine Department of Inland Fisheries and Wildlife

41 State House Station
Augusta, ME 04333
(207) 287-8000

USDA Natural Resources Conservation Service

967 Illinois Avenue, Suite #3
Bangor, ME 04401
(207) 990-9100 x 3

MAINE FOREST SERVICE PUBLICATIONS

Other Maine Forest Service publications can be found at maineforestservice.gov under "Publications" including:

- The Forest Rules of Maine
- Stumpage Price Reports
- The Forest Trees of Maine
- Forest Health and Monitoring Information Sheets
- Forest Policy and Management Information Sheets



You may also scan this QR code using an app on your smart device for immediate access to our website.

REFERENCES

- Calhoun, A. J. K. and P. deMaynadier. Forestry habitat management guidelines for vernal pool wildlife." MCA Technical Paper No. 6, Metropolitan Conservation Alliance, 2004. Wildlife Conservation Society, Bronx, New York.
- Hodgkins, G. "Estimating the Magnitude of Peak Flows for Streams in Maine for Selected Recurrence Intervals." Water Resources Investigations Report 99-4008. U.S. Geological Survey, 1999.
- Kennebec County Soil and Water Conservation District and the Maine Department of Environmental Protection. *Camp Road Maintenance Manual: A Guide for Landowners*. 2000.
- Maine Department of Environmental Protection. *Maine Erosion and Sediment Control BMPs*. 2003.
- Maine Department of Transportation. *Best Management Practices for Erosion and Sediment Control*. 1997.
- United States Department of Agriculture, Natural Resources Conservation Service. *Field Office Technical Guide*. 2002. Available at www.nrcs.usda.gov/technical/efotg
- United States Department of Agriculture, Soil Conservation Service. Computer Program for Project Formulation—Hydrology, Technical Release #20 (TR-20). 1983.
- United States Department of Agriculture, Soil Conservation Service. "Urban Hydrology for Small Watersheds," Technical Release #55 (TR-55). June, 1986.
- Verry, E.S.; J.W. Hornbeck; and C.A. Dollof (eds.) *Riparian Management in Forests of the Continental Eastern United States*. Boca Raton: Lewis Publishers, 2000.
- Welsch, D.J.; D.L. Smart; J.N. Boyer; P. Minkin; H.C. Smith; and T.L. McCandless. *Forested Wetlands: Functions, Benefits, and the Use of Best Management Practices*. USDA Forest Service publication NA-PR-001-95, 1995.
- Wiest, R.L. *A Landowner's Guide to Building Forest Access Roads*. USDA Forest Service publication NA-TP-06-98. 1998.

2017

Maine Department of Agriculture, Conservation & Forestry

Maine Forest Service

22 State House Station

1 (800) 367-0223 (in-state)

(207) 287-2791

www.maineforestservice.org

